B <u>O</u> E	PROPRIETARY NOTE THIS SPECIFICATION IS THE PROPERTY OF BOE BJ AND SHALL NOT BE REPRODUCED OR COPIED WITHOUT THE WRITTEN PERMISSION OF BOE BJ AND MUST BE RETURNED TO BOE BJ UPON ITS REQUEST					
SPEC. NUMBER	PRODUCT GROUP	Rev.	ISSUE DATE		PAGE	
	TFT-LCD	P1	2016.09.30	1	OF 33	

NV156FHM-N61 Preliminary Product Specification Rev. P1

HEFEI XINSHENG OPTOELECTRONICS TECHNOLOGY CO.,LTD

1

D	OE	PRODUCT GROUP	REV	ISSUE DATE
	<u>O</u> E	TFT- LCD PRODUCT	P0	2016.08.04
SPEC.	NUMBER	SPEC. TITLE NV156FHM-N61 Preliminary Product Sp	ecification	PAGE 2 OF 33
		REVISION HISTORY		•
REV.	ECN No.	DESCRIPTION OF CHANGES	DATE	PREPARED
P0	-	Initial Release	2016.08.04	曹江
P1	-	EDID	2016.09.30	刘兴洪
		. 4		
			*	
				2



BOE	PRODUCT GROUP	REV	ISSUE DATE	
	TFT- LCD PRODUCT	P1	2016.09.30	
SPEC. NUMBER	SPEC. TITLE NV156FHM-N61 Preliminary Product Sp	PAGE 3 OF 33		

Contents

No.	Items	Page
	REVISION HISTORY	2
	CONTENTS	3
1.0	General Description	4
2.0	Absolute Maximum ratings	6
3.0	Electrical specifications.	7
4.0	Optical specifications.	10
5.0	Interface Connection	15
6.0	Signal Timing Specification	18
7.0	Input Signals, Display Colors & Gray Scale of Colors	20
8.0	Power Sequence	21
9.0	Connector description	22
10.0	Mechanical Characteristics	23
11.0	Reliability Test	24
12.0	Handling & Cautions.	24
13.0	Label	25
14.0	Packing information	27
15.0	Mechanical Outline Dimension	28
16.0	EDID Table	30


3

BOE	PRODUCT GROUP	REV	ISSUE DATE
	TFT- LCD PRODUCT P1		2016.09.30
SPEC. NUMBER	SPEC. TITLE NV156FHM-N61 Preliminary Product Sp	PAGE 4 OF 33	

1.0 GENERAL DESCRIPTION

1.1 Introduction

NV156FHM-N61 V8.0 is a color active matrix TFT LCD module using amorphous silicon TFT's (Thin Film Transistors) as an active switching devices. This module has a 15.6 inch diagonally measured active area with FHD resolutions (1920 horizontal by 1080vertical pixel array). Each pixel is divided into RED, GREEN, BLUE dots which are arranged in vertical Stripe and this module can display 6bit+FRC colors. The TFT-LCD panel used for this module is a low reflection and higher color type. Therefore, this module is suitable for Notebook PC. The LED Driver for back-light driving is built in this model. All input signals are eDP1.2 interface compatible.

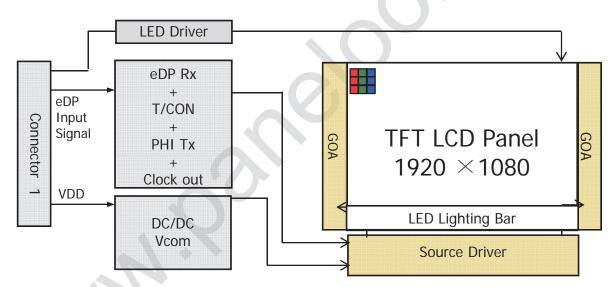

1.2 Features

- 2 lane eDP Interface with 2.7Gbps Link Rates
- Thin and light weight
- 6-bit+FRC color depth, display 6bit+FRC colors
- Single LED Lighting Bar. (Down side/Horizontal Direction)
- Green Product (RoHS & Halogen free product)
- On board LED Driving circuit
- Low driving voltage and low power consumption
- On board EDID chip

4



BOF	PRODUCT GROUP	REV	ISSUE DATE
	TFT- LCD PRODUCT P1		2016.09.30
SPEC. NUMBER	SPEC. TITLE NV156FHM-N61 Preliminary Product Sp	PAGE 5 OF 33	

1.3 Application

Notebook PC (Wide type)

1.4 General Specification

The followings are general specifications at the model NV156FHM-N61 V8.0. (listed in Table 1.)

<Table 1. General Specifications>

Parameter	Specification	Unit	Remarks
Active area	344.16 (H) ×193.59 (V)	mm	
Number of pixels	1920 (H) ×1080 (V)	pixels	
Pixel pitch	0.17925 (H) X 0.17925 (V)	mm	
Pixel arrangement	RGB Vertical stripe		
Display colors	6bit+FRC	colors	
Display mode	Normally Black		
Dimensional outline	350.66(H)*216.245(V) (W/PCB)*2.6(Max)	mm	
Weight	300 (max)	g	
Surface treatment	Anti-Glare		
Back-light	Lower Down side, 1-LED Lighting Bar type		Note 1
Power consumption	P□ : 0.88 (max)	W	@mosaic
	Рв. :3.09(max)	W	
	Ptotal :3.97(max)	W	@mosaic

Notes: 1. LED Lighting Bar (44*LED Array)

5



BOF	PRODUCT GROUP	REV	ISSUE DATE
	TFT- LCD PRODUCT P1		2016.09.30
SPEC. NUMBER	SPEC. TITLE NV156FHM-N61 Preliminary Product Sp	PAGE 6 OF 33	

3.0 ELECTRICAL SPECIFICATIONS

3.1 Electrical Specifications

< Table 3. Electrical specifications >

1a=25+/-2°C

Parameter		Min.	Тур.	Max.	Unit	Remarks
Power Supply Voltage	V _{DD}	3.0	3.3	3.6	V	Note 1
Permissible Input Ripple Voltage	V_{RF}	-	í	100	mV	At V _{DD} = 3.3V
Power Supply Current	I _{DD}	-	267	485	mA	Note 1
Differential Input Voltage	V _{ID}	200	-	600	mV	
	P _D	-	0.88	1.6	W	Note 1
Power Consumption	P_BL	-	-	3.09	W	Note 2
	P _{total}	-	-	4.69	W	

Notes : 1. The supply voltage is measured and specified at the interface connector of LCM. The current draw and power consumption specified is for 3.3V at 25℃.

a) Typ: Mosaic Pattern b) Max: R/G/B Pattern

2. Calculated value for reference (VLED \times ILED)

6

BOE	PRODUCT GROUP	REV	ISSUE DATE
	TFT- LCD PRODUCT	P1	2016.09.30
SPEC. NUMBER	SPEC. TITLE NV156FHM-N61 Preliminary Product Sp	oecification	PAGE 7 OF 33

3.2 Backlight Unit

< Table 4. LED Driving guideline specifications >

1a=25+/-2°C

	Parameter		Min.	Тур.	Max.	Unit	Remarks
LED Forward	Voltage	V_{F}	-	-	2.9	V	-
LED Forward	Current	I _F	-	21		mA	_
LED Power C	Consumption	P _{LED}		-	3.09	W	Note 1
LED Life-Time	e	N/A	15,000	-	_	Hour	I _F = 21mA
Power supply LED Driver	voltage for	V _{LED}	5	12	21	V	
EN Control	Backlight on		2.2	-	5.0	V	
Level	Backlight off		0	ı	0.6	V	
PWM Control	PWM High Level		2.2	ı	5.0	٧	
Level	PWM Low Level		0	-	0.6	V	
PWM Control Frequency		F _{PWM}	100	-	10,000	Hz	
Duty Ratio		-	1	-	100	%	Note3

Notes : 1. Power supply voltage12V for LED Driver Calculator Value for reference IF \times VF \times 44 / efficiency = PLED

- 2. The LED Life-time define as the estimated time to 50% degradation of initial luminous.
- 3. 1% duty cycle is achievable with a dimming frequency less than 1KHz.

7

BOF	PRODUCT GROUP	REV	ISSUE DATE
	TFT- LCD PRODUCT		2016.09.30
SPEC. NUMBER	SPEC. TITLE NV156FHM-N61 Preliminary Product Sp	pecification	PAGE 8 OF 33
	ı		•

3.3 LED structure



8

BOF PRODUCT GROUP REV		REV	ISSUE DATE
	TFT- LCD PRODUCT P1		2016.09.30
SPEC. NUMBER	SPEC. TITLE NV156FHM-N61 Preliminary Product Specification		PAGE 9 OF 33

4.0 OPTICAL SPECIFICATION

4.1 Overview

The test of Optical specifications shall be measured in a dark room (ambient luminance ≤ 1 lux and temperature = $25\pm2^{\circ}$ C) with the equipment of Luminance meter system (Goniometer system and PR730) and test unit shall be located at an approximate distance 50cm from the LCD surface at a viewing angle of θ and Φ equal to 0° . We refer to $\theta = 0$ (=03) as the 3 o'clock direction (the "right"), $\theta = 90$ (=012) as the 12 o'clock direction ("upward"), $\theta = 180$ (=09) as the 9 o'clock direction ("left") and $\theta = 270$ (=06) as the 6 o'clock direction ("bottom"). While scanning θ and/or \emptyset , the center of the measuring spot on the Display surface shall stay fixed. The backlight should be operating for 30 minutes prior to measurement. VDD shall be 3.3+/- 0.3V at 25°C. Optimum viewing angle direction is 6 'clock.

4.2 Optical Specifications

<Table 5. Optical Specifications>

Parame	eter	Symbol	Condition	Min.	Тур.	Max.	Unit	Remark
	l lovi-ontol	Θ_3		-	85	-	Deg.	
Viewing Angle	Horizontal	Θ_9	CR > 10	-	85	-	Deg.	Note 1
range	Vertical	Θ ₁₂	CR > 10	-	85	-	Deg.	Note i
	Vertical	Θ_6		-	85	-	Deg.	
Luminance Co	ntrast ratio	CR	Θ = 0°	-	800			Note 2
Luminance of White	5 Points	Y _w	Θ = 0°	-	300	-	cd/m ²	Note 3
White	5 Points	ΔΥ5	ILED = 21.6mA	80	-	-		N. 4
Luminance uniformity	13 Points	ΔΥ13		65	-	-		Note 4
White Chro	maticity	X _w	0-0	0.283	0.311	0.343		Note 5
Write Crito	maticity	y_w		0.299	0.332	0.365		
	Red	X _R			0.649			
	rteu	y _R			0.345			
Reproduction	Green	X _G	Θ = 0°	-0.03	0.334	+0.03		
of color	0.00	y _G		-0.00	0.613	10.03		
	Blue	X _R			0.151			
	Dido	y _B			0.058			
Gamı	ut				72		%	
Response Time (Rising + Falling)		T _{RT}	Ta= 25° C Θ = 0°	-	30	35	ms	Note 6
Cross 7	Talk	CT	⊝ = 0°	-	-	2.0	%	Note 7

9

BOF	PRODUCT GROUP REV		ISSUE DATE
	TFT- LCD PRODUCT P1		2016.09.30
SPEC. NUMBER	SPEC. TITLE NV156FHM-N61 Preliminary Product Sp	PAGE 10 OF 33	

Notes:

- 1. Viewing angle is the angle at which the contrast ratio is greater than 10. The viewing angles are determined for the horizontal or 3, 9 o'clock direction and the vertical or 6, 12 o'clock direction with respect to the optical axis which is normal to the LCD surface (see FIGURE 1).
- 2. Contrast measurements shall be made at viewing angle of Θ = 0 and at the center of the LCD surface. Luminance shall be measured with all pixels in the view field set first to white, then to the dark (black) state . (see FIGURE 1) Luminance Contrast Ratio (CR) is defined mathematically.


- 3. Center Luminance of white is defined as luminance values of 5 point average across the LCD surface. Luminance shall be measured with all pixels in the view field set first to white. This measurement shall be taken at the locations shown in FIGURE 2 for a total of the measurements per display.
- 4. The White luminance uniformity on LCD surface is then expressed as : ΔY =Minimum Luminance of 5(or 13) points / Maximum Luminance of 5(or 13) points. (see FIGURE 2 and FIGURE 3).
- 5. The color chromaticity coordinates specified in Table 5 shall be calculated from the spectral data measured with all pixels first in red, green, blue and white. Measurements shall be made at the center of the panel.
- 6. The electro-optical response time measurements shall be made as FIGURE 4 by switching the "data" input signal ON and OFF. The times needed for the luminance to change from 10% to 90% is Tr, and 90% to 10% is Td.
- 7. Cross-Talk of one area of the LCD surface by another shall be measured by comparing the luminance (YA) of a 25mm diameter area, with all display pixels set to a gray level, to the luminance (YB) of that same area when any adjacent area is driven dark. (See FIGURE 5).

10

BOE	PRODUCT GROUP	REV	ISSUE DATE
	TFT- LCD PRODUCT P1		2016.09.30
SPEC. NUMBER	SPEC. TITLE NV156FHM-N61 Preliminary Product Specification		PAGE 11 OF 33

4.3 Optical measurements

Figure 1. Measurement Set Up

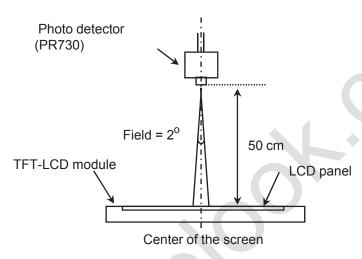

Optical characteristics measurement setup

Figure 2. White Luminance and Uniformity Measurement Locations (5 points)



Center Luminance of white is defined as luminance values of center 5 points across the LCD surface. Luminance shall be measured with all pixels in the view field set first to white. This measurement shall be taken at the locations shown in FIGURE 2 for a total of the measurements per display.

11


BOF	PRODUCT GROUP REV		ISSUE DATE
TFT- LCD PRODUCT P1		P1	2016.09.30
SPEC. NUMBER	SPEC. TITLE NV156FHM-N61 Preliminary Product Specification		PAGE 12 OF 33

Figure 3. Uniformity Measurement Locations (13 points)



The White luminance uniformity on LCD surface is then expressed as : $\Delta Y5$ = Minimum Luminance of five points / Maximum Luminance of five points (see FIGURE 2) , $\Delta Y13$ = Minimum Luminance of 13 points /Maximum Luminance of 13 points (see FIGURE 3).

Figure 4. Response Time Testing

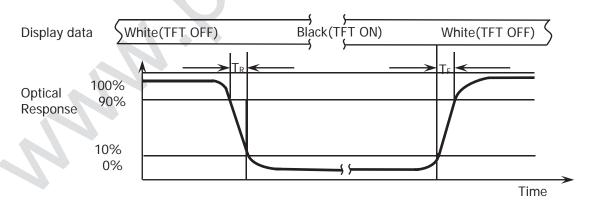


The electro-optical response time measurements shall be made as shown in FIGURE 4 by switching the "data" input signal ON and OFF. The times needed for the luminance to change from 10% to 90% is Td and 90% to 10% is Tr.

12

BOE PRODUCT GROUP REV TFT- LCD PRODUCT P1		REV	ISSUE DATE
		2016.09.30	
SPEC. NUMBER	UMBER SPEC. TITLE NV156FHM-N61 Preliminary Product Specification		PAGE 13 OF 33

Figure 5. Cross Modulation Test Description

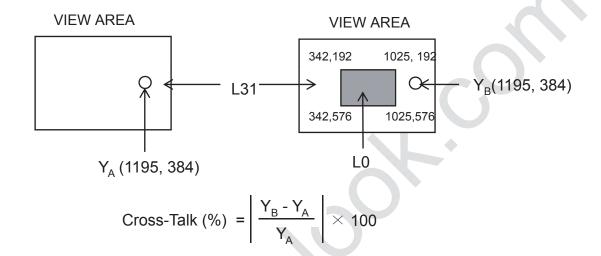

Where:

 Y_A = Initial luminance of measured area (cd/m²) Y_B = Subsequent luminance of measured area (cd/m²) The location measured will be exactly the same in both patterns

Cross-Talk of one area of the LCD surface by another shall be measured by comparing the luminance (YA) of a 25mm diameter area, with all display pixels set to a gray level, to the luminance (YB) of that same area when any adjacent area is driven dark (Refer to FIGURE 5).

13



BOE	PRODUCT GROUP	PRODUCT GROUP REV	
	TFT- LCD PRODUCT P1		2016.09.30
SPEC. NUMBER	SPEC. TITLE NV156FHM-N61 Preliminary Product Specification		PAGE 14 OF 33

5.0 INTERFACE CONNECTION.

5.1 Electrical Interface Connection

The electronics interface connector is UJU IS050-L30B-C10.

The connector interface pin assignments are listed in Table 6.

<Table 6. Pin Assignments for the Interface Connector>


Terminal Symbol Description Pin No. Symbol Description 1 NC No Connection 2 H_GND Ground 3 LANE1_N eDP RX channel 1 negative 4 LANE1_P eDP RX channel 1 positive 5 H_GND Ground 6 LANE0_N eDP RX channel 0 positive 7 LANE0_P eDP RX channel 0 positive 8 H_GND Ground 9 AUX_CH_P eDP AUX CH positive 10 AUX_CH_P eDP AUX CH positive 11 H_GND Ground 12 LCD_VCC Power Supply, 3.3V (typ.) 13 LCD_VCC Power Supply, 3.3V (typ.) 14 LCD_Self_Test Panel self test enable 15 H_GND Ground 16 H_GND Ground 17 HPD Hot plug detect output 18 BL_GND LED Ground 20 BL_GND LED Ground		Table 6. Pili As	signments for the Interface Connector>	
NC	Terminal	Symbol	Functions	
2 H_GND Ground 3 LANE1_N eDP RX channel 1 negative 4 LANE1_P eDP RX channel 1 positive 5 H_GND Ground 6 LANE0_N eDP RX channel 0 negative 7 LANE0_P eDP RX channel 0 positive 8 H_GND Ground 9 AUX_CH_P eDP AUX CH positive 10 AUX_CH_N eDP AUX CH negative 11 H_GND Ground 12 LCD_VCC Power Supply, 3.3V (typ.) 13 LCD_VCC Power Supply, 3.3V (typ.) 14 LCD_Self_Test Panel self test enable 15 H_GND Ground 16 H_GND Ground 17 HPD Hot plug detect output 18 BL_GND LED Ground 20 BL_GND LED Ground 21 BL_GND LED Ground 22 BL_ENABLE LED enable pin(+3.3V Input) 23 BL_PWM System PWM Signal Input	Pin No.	Symbol	Description	
3	1	NC	No Connection	
4 LANE1_P eDP RX channel 1 positive 5 H_GND Ground 6 LANE0_N eDP RX channel 0 negative 7 LANE0_P eDP RX channel 0 positive 8 H_GND Ground 9 AUX_CH_P eDP AUX CH positive 10 AUX_CH_N eDP AUX CH negative 11 H_GND Ground 12 LCD_VCC Power Supply, 3.3V (typ.) 13 LCD_VCC Power Supply, 3.3V (typ.) 14 LCD_Self_Test Panel self test enable 15 H_GND Ground 16 H_GND Ground 17 HPD Hot plug detect output 18 BL_GND LED Ground 20 BL_GND LED Ground 21 BL_GND LED Ground 21 BL_GND LED Ground 22 BL_ENABLE LED enable pin(+3.3V Input) 23 BL_PWM System PWM Signal Input 24 NC No Connection	2	H_GND	Ground	
5 H_GND Ground 6 LANEO_N eDP RX channel 0 negative 7 LANEO_P eDP RX channel 0 positive 8 H_GND Ground 9 AUX_CH_P eDP AUX CH positive 10 AUX_CH_N eDP AUX CH negative 11 H_GND Ground 12 LCD_VCC Power Supply, 3.3V (typ.) 13 LCD_VCC Power Supply, 3.3V (typ.) 14 LCD_Self_Test Panel self test enable 15 H_GND Ground 16 H_GND Ground 17 HPD Hot plug detect output 18 BL_GND LED Ground 19 BL_GND LED Ground 20 BL_GND LED Ground 21 BL_GND LED Ground 22 BL_ENABLE LED enable pin(+3.3V Input) 23 BL_PWM System PWM Signal Input 24 NC No Connection 25 NC No Connection <	3	LANE1_N	eDP RX channel 1 negative	
6 LANEO_N eDP RX channel 0 negative 7 LANEO_P eDP RX channel 0 positive 8 H_GND Ground 9 AUX_CH_P eDP AUX CH positive 10 AUX_CH_N eDP AUX CH negative 11 H_GND Ground 12 LCD_VCC Power Supply, 3.3V (typ.) 13 LCD_VCC Power Supply, 3.3V (typ.) 14 LCD_Self_Test Panel self test enable 15 H_GND Ground 16 H_GND Ground 17 HPD Hot plug detect output 18 BL_GND LED Ground 19 BL_GND LED Ground 20 BL_GND LED Ground 21 BL_GND LED Ground 22 BL_ENABLE LED enable pin(+3.3V Input) 23 BL_PWM System PWM Signal Input 24 NC No Connection 25 NC No Connection 26 BL_POWER LED Power Supply 5V-21V 27 BL_POWER LED Power Supply 5V-21V 28 BL_POWER LED Power Supply 5V-21V 29 BL_POWER LED Power Supply 5V-21V	4	LANE1_P	eDP RX channel 1 positive	
7 LANEO_P eDP RX channel 0 positive 8 H_GND Ground 9 AUX_CH_P eDP AUX CH positive 10 AUX_CH_N eDP AUX CH negative 11 H_GND Ground 12 LCD_VCC Power Supply, 3.3V (typ.) 13 LCD_VCC Power Supply, 3.3V (typ.) 14 LCD_Self_Test Panel self test enable 15 H_GND Ground 16 H_GND Ground 17 HPD Hot plug detect output 18 BL_GND LED Ground 19 BL_GND LED Ground 20 BL_GND LED Ground 21 BL_GND LED Ground 22 BL_ENABLE LED enable pin(+3.3V Input) 23 BL_PWM System PWM Signal Input 24 NC No Connection 25 NC No Connection 26 BL_POWER LED Power Supply 5V-21V 28 BL_POWER LED Power Supply 5V-21V <td>5</td> <td>H_GND</td> <td>Ground</td>	5	H_GND	Ground	
8 H_GND Ground 9 AUX_CH_P eDP AUX CH positive 10 AUX_CH_N eDP AUX CH negative 11 H_GND Ground 12 LCD_VCC Power Supply, 3.3V (typ.) 13 LCD_VCC Power Supply, 3.3V (typ.) 14 LCD_Self_Test Panel self test enable 15 H_GND Ground 16 H_GND Ground 17 HPD Hot plug detect output 18 BL_GND LED Ground 19 BL_GND LED Ground 20 BL_GND LED Ground 21 BL_GND LED Ground 22 BL_ENABLE LED Ground 23 BL_FWM System PWM Signal Input 24 NC No Connection 25 NC No Connection 26 BL_POWER LED Power Supply 5V-21V 27 BL_POWER LED Power Supply 5V-21V 28 BL_POWER LED Power Supply 5V-21V	6	LANE0_N	eDP RX channel 0 negative	
9 AUX_CH_P eDP AUX CH positive 10 AUX_CH_N eDP AUX CH negative 11 H_GND Ground 12 LCD_VCC Power Supply, 3.3V (typ.) 13 LCD_VCC Power Supply, 3.3V (typ.) 14 LCD_Self_Test Panel self test enable 15 H_GND Ground 16 H_GND Ground 17 HPD Hot plug detect output 18 BL_GND LED Ground 19 BL_GND LED Ground 20 BL_GND LED Ground 21 BL_GND LED Ground 22 BL_ENABLE LED Ground 22 BL_ENABLE LED Ground 23 BL_PWM System PWM Signal Input 24 NC No Connection 25 NC No Connection 26 BL_POWER LED Power Supply 5V-21V 28 BL_POWER LED Power Supply 5V-21V 29 BL_POWER LED Power Supply 5V-21V <td>7</td> <td>LANE0_P</td> <td>eDP RX channel 0 positive</td>	7	LANE0_P	eDP RX channel 0 positive	
10 AUX_CH_N eDP AUX CH negative 11 H_GND Ground 12 LCD_VCC Power Supply, 3.3V (typ.) 13 LCD_VCC Power Supply, 3.3V (typ.) 14 LCD_Self_Test Panel self test enable 15 H_GND Ground 16 H_GND Ground 17 HPD Hot plug detect output 18 BL_GND LED Ground 19 BL_GND LED Ground 20 BL_GND LED Ground 21 BL_GND LED Ground 22 BL_ENABLE LED enable pin(+3.3V Input) 23 BL_PWM System PWM Signal Input 24 NC No Connection 25 NC No Connection 26 BL_POWER LED Power Supply 5V-21V 27 BL_POWER LED Power Supply 5V-21V 28 BL_POWER LED Power Supply 5V-21V 29 BL_POWER LED Power Supply 5V-21V	8	H_GND	Ground	
11	9	AUX_CH_P	eDP AUX CH positive	
12	10	AUX_CH_N	eDP AUX CH negative	
13	11	H_GND	Ground	
14 LCD_Self_Test Panel self test enable 15 H_GND Ground 16 H_GND Ground 17 HPD Hot plug detect output 18 BL_GND LED Ground 19 BL_GND LED Ground 20 BL_GND LED Ground 21 BL_GND LED Ground 22 BL_ENABLE LED enable pin(+3.3V Input) 23 BL_PWM System PWM Signal Input 24 NC No Connection 25 NC No Connection 26 BL_POWER LED Power Supply 5V-21V 27 BL_POWER LED Power Supply 5V-21V 28 BL_POWER LED Power Supply 5V-21V 29 BL_POWER LED Power Supply 5V-21V	12	LCD_VCC	Power Supply, 3.3V (typ.)	
15 H_GND Ground 16 H_GND Ground 17 HPD Hot plug detect output 18 BL_GND LED Ground 19 BL_GND LED Ground 20 BL_GND LED Ground 21 BL_GND LED Ground 22 BL_ENABLE LED enable pin(+3.3V Input) 23 BL_PWM System PWM Signal Input 24 NC No Connection 25 NC No Connection 26 BL_POWER LED Power Supply 5V-21V 27 BL_POWER LED Power Supply 5V-21V 28 BL_POWER LED Power Supply 5V-21V 29 BL_POWER LED Power Supply 5V-21V	13	LCD_VCC	Power Supply, 3.3V (typ.)	
16 H_GND Ground 17 HPD Hot plug detect output 18 BL_GND LED Ground 19 BL_GND LED Ground 20 BL_GND LED Ground 21 BL_GND LED Ground 22 BL_ENABLE LED enable pin(+3.3V Input) 23 BL_PWM System PWM Signal Input 24 NC No Connection 25 NC No Connection 26 BL_POWER LED Power Supply 5V-21V 27 BL_POWER LED Power Supply 5V-21V 28 BL_POWER LED Power Supply 5V-21V 29 BL_POWER LED Power Supply 5V-21V	14	LCD_Self_Test	Panel self test enable	
17 HPD Hot plug detect output 18 BL_GND LED Ground 19 BL_GND LED Ground 20 BL_GND LED Ground 21 BL_GND LED Ground 22 BL_ENABLE LED enable pin(+3.3V Input) 23 BL_PWM System PWM Signal Input 24 NC No Connection 25 NC No Connection 26 BL_POWER LED Power Supply 5V-21V 27 BL_POWER LED Power Supply 5V-21V 28 BL_POWER LED Power Supply 5V-21V 29 BL_POWER LED Power Supply 5V-21V	15	H_GND	Ground	
18 BL_GND LED Ground 19 BL_GND LED Ground 20 BL_GND LED Ground 21 BL_GND LED Ground 22 BL_ENABLE LED enable pin(+3.3V Input) 23 BL_PWM System PWM Signal Input 24 NC No Connection 25 NC No Connection 26 BL_POWER LED Power Supply 5V-21V 27 BL_POWER LED Power Supply 5V-21V 28 BL_POWER LED Power Supply 5V-21V 29 BL_POWER LED Power Supply 5V-21V	16	H_GND	Ground	
19 BL_GND LED Ground 20 BL_GND LED Ground 21 BL_GND LED Ground 22 BL_ENABLE LED enable pin(+3.3V Input) 23 BL_PWM System PWM Signal Input 24 NC No Connection 25 NC No Connection 26 BL_POWER LED Power Supply 5V-21V 27 BL_POWER LED Power Supply 5V-21V 28 BL_POWER LED Power Supply 5V-21V 29 BL_POWER LED Power Supply 5V-21V	17	HPD	Hot plug detect output	
20 BL_GND LED Ground 21 BL_GND LED Ground 22 BL_ENABLE LED enable pin(+3.3V Input) 23 BL_PWM System PWM Signal Input 24 NC No Connection 25 NC No Connection 26 BL_POWER LED Power Supply 5V-21V 27 BL_POWER LED Power Supply 5V-21V 28 BL_POWER LED Power Supply 5V-21V 29 BL_POWER LED Power Supply 5V-21V	18	BL_GND	LED Ground	
21 BL_GND LED Ground 22 BL_ENABLE LED enable pin(+3.3V Input) 23 BL_PWM System PWM Signal Input 24 NC No Connection 25 NC No Connection 26 BL_POWER LED Power Supply 5V-21V 27 BL_POWER LED Power Supply 5V-21V 28 BL_POWER LED Power Supply 5V-21V 29 BL_POWER LED Power Supply 5V-21V	19	BL_GND	LED Ground	
22 BL_ENABLE LED enable pin(+3.3V Input) 23 BL_PWM System PWM Signal Input 24 NC No Connection 25 NC No Connection 26 BL_POWER LED Power Supply 5V-21V 27 BL_POWER LED Power Supply 5V-21V 28 BL_POWER LED Power Supply 5V-21V 29 BL_POWER LED Power Supply 5V-21V	20	BL_GND	LED Ground	
23 BL_PWM System PWM Signal Input 24 NC No Connection 25 NC No Connection 26 BL_POWER LED Power Supply 5V-21V 27 BL_POWER LED Power Supply 5V-21V 28 BL_POWER LED Power Supply 5V-21V 29 BL_POWER LED Power Supply 5V-21V	21	BL_GND	LED Ground	
24 NC No Connection 25 NC No Connection 26 BL_POWER LED Power Supply 5V-21V 27 BL_POWER LED Power Supply 5V-21V 28 BL_POWER LED Power Supply 5V-21V 29 BL_POWER LED Power Supply 5V-21V	22	BL_ENABLE	LED enable pin(+3.3V Input)	
25 NC No Connection 26 BL_POWER LED Power Supply 5V-21V 27 BL_POWER LED Power Supply 5V-21V 28 BL_POWER LED Power Supply 5V-21V 29 BL_POWER LED Power Supply 5V-21V	23	BL_PWM	System PWM Signal Input	
26 BL_POWER LED Power Supply 5V-21V 27 BL_POWER LED Power Supply 5V-21V 28 BL_POWER LED Power Supply 5V-21V 29 BL_POWER LED Power Supply 5V-21V	24	NC	No Connection	
27 BL_POWER LED Power Supply 5V-21V 28 BL_POWER LED Power Supply 5V-21V 29 BL_POWER LED Power Supply 5V-21V		NC	No Connection	
28 BL_POWER LED Power Supply 5V-21V 29 BL_POWER LED Power Supply 5V-21V		BL_POWER	LED Power Supply 5V-21V	
29 BL_POWER LED Power Supply 5V-21V		BL_POWER	LED Power Supply 5V-21V	
_ ''''	28	BL_POWER	LED Power Supply 5V-21V	
·	29	BL_POWER	LED Power Supply 5V-21V	
	30	NC	No Connection 14	

A4(210 X 297)

R2010-6053-O(3/3)

BOE	PRODUCT GROUP REV		ISSUE DATE
	TFT- LCD PRODUCT P1		2016.09.30
SPEC. NUMBER	SPEC. TITLE NV156FHM-N61 Preliminary Product Specification		PAGE 15 OF 33

5-2. eDP Interface

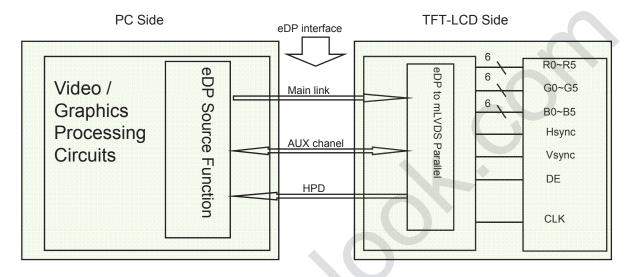

Note. Transmitter: Parade DP501 or equivalent.

Transmitter is not contained in Module.

5.3.eDP Input signal

Lane 0	Lane 1
R0-7:0	R1-7:0
G0-7:0	G1-7:0
B0-7:0	B1-7:0
R2-7:0	R3-7:0
G2-7:0	G3-7:0
B2-7:0	B3-7:0
R4-7:0	R5-7:0
G4-7:0	G5-7:0
B4-7:0	B5-7:0

15

BOE	PRODUCT GROUP REV		ISSUE DATE
	TFT- LCD PRODUCT P1		2016.09.30
SPEC. NUMBER	SPEC. TITLE NV156FHM-N61 Preliminary Product Specification		PAGE 16 OF 33

5.4 Back-light & LCM Interface Connection

Interface Connector: STM MSK24022P10 or BOE-120521-01

<Table 7. Pin Assignments for the BLU & LCM Connector>

Pin No.	Symbol	Description	Pin No.	Symbol	Description
1	LED1	LED cathode connection	6	NC	No Connection
2	LED2	LED cathode connection	7	NC	No Connection
3	LED3	LED cathode connection	8	Vout	LED anode connection
4	LED4	LED cathode connection	9	Vout	LED anode connection
5	NC	No Connection	10	Vout	LED anode connection

16

BOE	PRODUCT GROUP	REV	ISSUE DATE
	TFT- LCD PRODUCT	P1	2016.09.30
SPEC. NUMBER	SPEC. TITLE NV156FHM-N61 Preliminary Product Sp	ecification	PAGE 17 OF 33

6.0 SIGNAL TIMING SPECIFICATION

6.1 The NV156FHM-N61 is operated by the DE only.

Item		Symbols	Min	Тур	Max	Unit
	Frequency	1/Tc	101	152.6	158	MHz
Clock	High Time	Tch	-	4/7	-	Tc
	Low Time	Tcl	-	3/7	2	Tc
Frame Period			1100	1140	1200	lines
		Tv	-	60	1	Hz
			1-1	16.7	-	ms
Vertical Display Period		Tvd		1080	1	lines
One line Scanning Period		o I In		2230	2400	clocks
Horizontal Display Period		Thd	-	1920	-	clocks


Note*: This Module can support low frame refresh rate 50Hz & 40Hz.

17

BOE	PRODUCT GROUP	REV	ISSUE DATE
	TFT- LCD PRODUCT	P1	2016.09.30
SPEC. NUMBER	SPEC. TITLE		PAGE
	NV156FHM-N61 Preliminary Product Sp	18 OF 33	

8.0 POWER SEQUENCE

To prevent a latch-up or DC operation of the LCD module, the power on/off seq uence shall be as shown in below

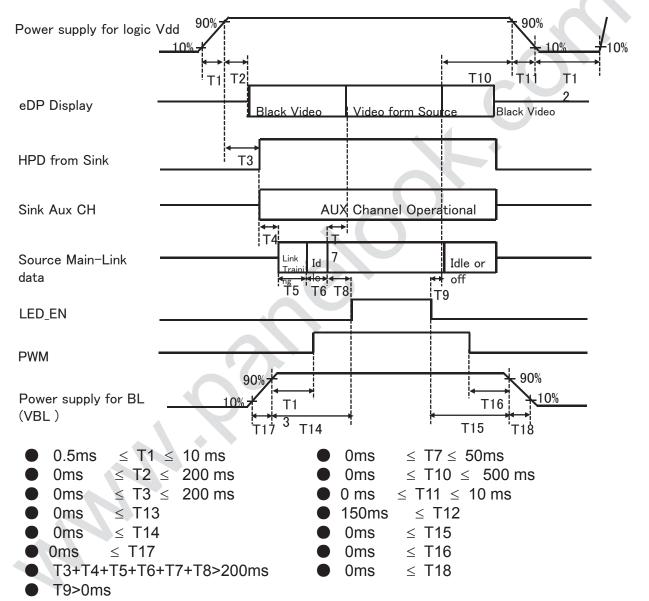

Notes:

- 1. When the power supply VDD is 0V, keep the level of input signals on the low or keep high impedance.
- 2. Do not keep the interface signal high impedance when power is on. Back Light must be turn on after power for logic and interface signal are valid.

18

BOE	PRODUCT GROUP TFT- LCD PRODUCT SPEC. TITLE	REV	ISSUE DATE
	TFT- LCD PRODUCT	P1	2016.09.30
SPEC. NUMBER	SPEC. TITLE NV156FHM-N61 Preliminary Product Sp	oecification	PAGE 19 OF 33

9.0 Connector Description

Physical interface is described as for the connector on LCM.

These connectors are capable of accommodating the following signals and will be following components.

9.1 TFT LCD Module

For Signal Connector
UJU
IS050-L30B-C10
I-PEX 20454-030T or Compatible

19

BOE	PRODUCT GROUP	REV	ISSUE DATE			
	TFT- LCD PRODUCT P1					
SPEC. NUMBER	SPEC. TITLE NV156FHM-N61 Preliminary Product Sp	pecification	PAGE 20 OF 33			

10.0 MECHANICAL CHARACTERISTICS

10.1 Dimensional Requirements

FIGURE 6 shows mechanical outlines for the model NV156FHM-N61. Other parameters are shown in Table 9.

<Table 9. Dimensional Parameters>

Parameter	Specification	Unit
Active Area	344.16 (H) ×193.59(V)	
Number of pixels	1920 (H) X 1080 (V) (1 pixel = R + G + B dots)	
Pixel pitch	0.17925 (H) X 0.17925 (V)	mm
Pixel arrangement	Pixel arrangement RGB Vertical stripe	
Display colors	6bit+FRC	
Display mode Normally Black		
Dimensional outline	350.66(H)*216.245(V) (W/PCB)*2.6(Max)	mm
Weight	300(Max)	gram
Pook Light	Connector :STM MSK24022P10 or BOE-120521-01	
Back Light	LED, Horizontal-LED Array type	

10.2 Mounting

See FIGURE 6.

10.3 Anti-Glare and Polarizer Hardness.

The surface of the LCD has an AG coating to minimize reflection and a coating to reduce s cratching. The Polarizer Hardness is 3H.

10.4 Light Leakage

There shall not be visible light from the back-lighting system around the edges of the screen as seen from a distance 50cm from the screen with an overhead light level of 350lux.

20

BOE -	PRODUCT GROUP	REV	ISSUE DATE
	TFT- LCD PRODUCT	2016.09.30	
SPEC. NUMBER	SPEC. TITLE NV156FHM-N61 Preliminary Product Sp	pecification	PAGE 21 OF 33

11.0 RELIABILITY TEST

The Reliability test items and its conditions are shown in below.

<Table 10. Reliability test>

No	Test Items	Conditions
1	High temperature storage test	Ta = 60 ℃, 240 hrs
2	Low temperature storage test	Ta = -20 ℃, 240 hrs
3	High temperature & high humidity operation test	Ta = 50 ℃, 80%RH, 240 hrs
4	High temperature operation test	Ta = 50 ℃, 240 hrs
5	Low temperature operation test	Ta = 0 °C, 240 hrs
6	Thermal shock	Ta = -20 $^{\circ}$ C \leftrightarrow 60 $^{\circ}$ C (0.5 hr), 100 cycle
7	Vibration test (non-operating)	1.5G, 10~500Hz,Half Sine X,Y,Z / Sweep rate : 1 hour
8	Shock test (non-operating)	220G, Half Sine Wave 2msec \pm X, \pm Y, \pm Z Once for each direction
9	Electro-static discharge test (non-operating)	Air : 150 pF, 330Ω, 15 KV Contact : 150 pF, 330Ω, 8 KV

12.0 HANDLING & CAUTIONS

- (1) Cautions when taking out the module
 - Pick the pouch only, when taking out module from a shipping package.
- (2) Cautions for handling the module
 - As the electrostatic discharges may break the LCD module, handle the LCD module with care. Peel a protection sheet off from the LCD panel surface as slowly as possible.
 - As the LCD panel and back light element are made from fragile glass material, impulse and pressure to the LCD module should be avoided.
 - As the surface of the polarizer is very soft and easily scratched, use a soft dry cloth without chemicals for cleaning.
 - Do not pull the interface connector in or out while the LCD module is operating.
 - Put the module display side down on a flat horizontal plane.
 - Handle connectors and cables with care.
- (3) Cautions for the operation
 - When the module is operating, do not lose CLK, ENAB signals. If any one of these signals is lost, the LCD panel would be damaged.
 - Obey the supply voltage sequence. If wrong sequence is applied, the module would be damaged.



BOE	PRODUCT GROUP	REV	ISSUE DATE
	TFT- LCD PRODUCT	P1	2016.09.30
SPEC. NUMBER	SPEC. TITLE NV156FHM-N61 Preliminary Product Sp	pecification	PAGE 22 OF 33

(4) Cautions for the atmosphere

Global LCD Panel Exchange Center

- Dew drop atmosphere should be avoided.
- Do not store and/or operate the LCD module in a high temperature and/or humidity atmosphere. Storage in an electro-conductive polymer packing pouch and under relatively low temperature atmosphere is recommended.
- (5) Cautions for the module characteristics
 - Do not apply fixed pattern data signal to the LCD module at product aging.
 - Applying fixed pattern for a long time may cause image sticking.
- (6) Other cautions
 - Do not disassemble and/or re-assemble LCD module.
 - Do not re-adjust variable resistor or switch etc.
 - When returning the module for repair or etc., Please pack the module not to be broken. We recommend to use the original shipping packages.

13.0 LABEL

(1) MDL label

22



BOE	TFT- LCD PRODUCT	REV	ISSUE DATE
	TFT- LCD PRODUCT	P1	2016.09.30
SPEC. NUMBER	SPEC. TITLE NV156FHM-N61 Preliminary Product Sp	pecification	PAGE 23 OF 33

(2) High voltage caution label



HIGH ME. TAGE CAUTION

RICK OF LUCCTRIC 194004. DISCONNECT THE ELECTRIC POWER BEFORE SERVICING COLD CATHODE FLUCRESCENT LAMP IN LCD PANEL CENTAINS A SMALL AMOUNT OF MERCURY, FLEASE FOLLOW LOCAL OR DINANCES UP REJULATIONS FER DISPUSAL.

(3) Box label

Label Size: 110 mm (L) × 55 mm (W)

Contents

Model: NV156FHM-N61 Q'ty: Module Q'ty in one box Serial No.: Box Serial No. Date: Packing Date Internal use of Product



Code Digit	1	2	3	4	5	6	7	8	9	10	11	12	13
Code	S	L	S	5	1	2	3	D	0	0	0	6	8
Description	Produc	ts GBN	Grade	Line	Ye	ar	Month	Revisio n Code			alNo		

23


A4(210 X 297)

BOF	PRODUCT GROUP	REV	ISSUE DATE
	TFT- LCD PRODUCT	P1	2016.09.30
SPEC. NUMBER	SPEC. TITLE NV156FHM-N61 Preliminary Product Sp	ecification	PAGE 24 OF 33

15.0 PACKING INFORMATION

15.1 Packing order

R2010-6053-O(3/3)

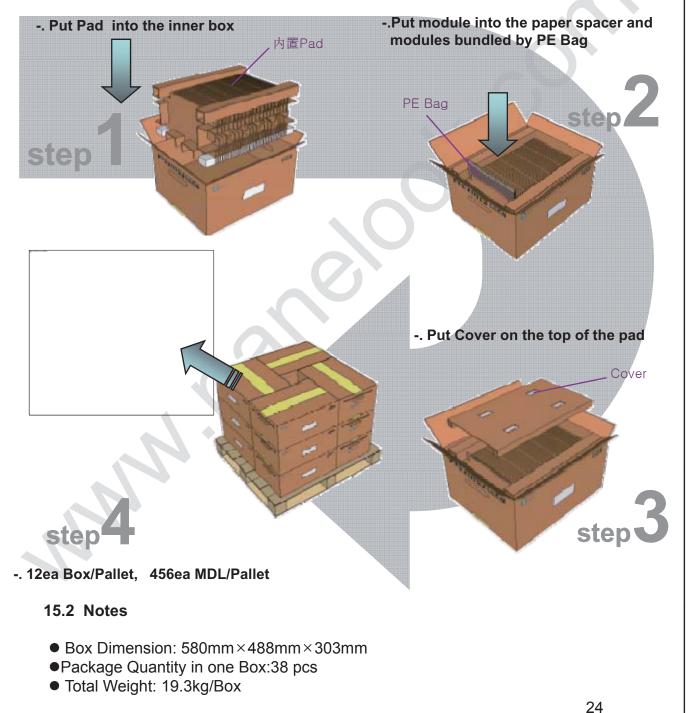

BOE	PRODUCT GROUP	REV	ISSUE DATE
	TFT- LCD PRODUCT	P1	2016.09.30
SPEC. NUMBER	SPEC. TITLE NV156FHM-N61 Preliminary Product Sp	PAGE 25 OF 33	

16.0 MECHANICAL OUTLINE DIMENSION

Figure 6. TFT-LCD Module Outline Dimension (Front View)

25

BOE	PRODUCT GROUP	REV	ISSUE DATE
	TFT- LCD PRODUCT	P1	2016.09.30
SPEC. NUMBER	SPEC. TITLE NV156FHM-N61 Preliminary Product Sp	PAGE 26 OF 33	

Figure 7. TFT-LCD Module Outline Dimensions (Rear view)

26



BOE	PRODUCT GROUP	REV	ISSUE DATE
	TFT- LCD PRODUCT	P1	2016.09.30
SPEC. NUMBER	SPEC. TITLE NV156FHM-N61 Preliminary Product Sp	PAGE 27 OF 33	

17.EDID Table

Address (HEX)	Function	Hex	Dec	crc	Input values.	Notes
00		00	0		0	
01		FF	255		255	
02		FF	255		255	
03		FF	255		255	
04	Header	FF	255		255	EDID Header
05		FF	255		255	
06		FF	255		255	
07		00	0		0	
08	ID Manufacturer	09	9		U	
09	Name	E5	229		BOE	ID = BOE
0A	Ivanic	FB	251			
OB	ID Product Code	06	6		1787	ID = 1787
0C		00	0			
0D		00	0	<u> </u>		
0E	32-bit serial No.	00	0			
OF		00	0			
10	Week of manufacture	01	1	7	1	
11	Year of Manufacture	1A	26		2016	Manufactured in 2016
12	EDID Structure Ver.	01	1		1	EDID Ver 1.0
13	EDID revision #	04	4		4	EDID Rev. 0.4
14	Video input definition	A5	165		-	digital signal/DP input
15	Max H image size	22	34		34	34 cm (Approx)
16	Max V image size	13	19		19	19 cm (Approx)
17	Display Gamma	78	120		2.2	Gamma curve = 2.2
18	Feature support	02	2			RGB display, Preferred Timming mode/RGB 4:4:4
19	Red/Green low bits	1B	27		-	Red / Green Low Bits
1A	Blue/White low bits	BB	187		-	Blue / White Low Bits
1B	Red x high bits	A6	166	664	0.649	Red $(x) = 10100110 (0.649)$
1C	Red y high bits	58	88	353	0.345	Red (y) = 01011000 (0.345)
1D	Green x high bits	55	85	342	0.334	Green $(x) = 01010101 (0.334)$
1E	Green y high bits	9D	157	627	0.613	Green $(y) = 10011101 (0.613)$
1F	Blue x high bits	26	38	154	0.151	Blue $(x) = 00100110 (0.151)$
20	BLue y high bits	0E	14	59	0.058	Blue $(y) = 00001110 (0.058)$
21	White x high bits	4F	79	318	0.311	White $(x) = 01001111 (0.311)$
22	White y high bits	55	85	339	0.332	White $(y) = 01010101 (0.332)$
			î e			
23	Established timing 1	00	0		-	

27 A4(210 X 297) R2010-6053-O(3/3)

R	OE	Р	ROD	UCT (REV	ISSUE DATE		
ט	\succeq \square		TFT- L	CD PROI	DUCT		P1	2016.09.30
SPEC.	NUMBER		. TITLE 6FHM-I	N61 Prel	iminary P	roduct Sp	pecification	PAGE 28 OF 33
25	Established timing	00	0		-			
26	Standard timing	01	1					
27	#1	01	1				Not Used	
28	Standard timing	01	1					
29	#2	01	1				Not Used	
2A	Standard timing	01	1				Not Used	
2B	#3	01	1				Not Used	
2C	Standard timing	01	1				Not Used	
2D	#4	01	1				Not osed	
2E	Standard timing	01	1				Not Used	
2F	#5	01	1				Not osed	
30	Standard timing	01	1				Not Used	
31	#6	01	1					
32	Standard timing	01	1	4			Not Used	
33	#7	01	1					
34	Standard timing	01	1			_	Not Used	
35	#8	01	1					
36	_	9C	156		152.6		152.6MHz Main o	clock
37	_	3B	59					
38	_	80	128		1920		Hor Active = 19	
39	_	36	54		310	4 hita	Hor Blanking =	
3A		71	113		-	4 DILS	of Hor. Active + 4 Blanking	טונא טו חטו .
3B		38	56		1080		Ver Active = 10	080
3C		3C 🔷	60		60		Ver Blanking =	60
3D		40	64		-	4 bits	of Ver. Active + 4 Blanking	bits of Ver.
3E	Detailed	30	48		48		Hor Sync Offset	= 48
3F	timing/monitor descriptor #1	20	32		32	ŀ	l Sync Pulse Widtl	n = 32
40	descriptor " 1	36	54		3		V sync Offset = 3	3 line
41		00	0		6	1	Sync Pulse width	
42		58	88		344	Horizont	al Image Size = 34 bits)	44 mm (Low 8
43		C2	194		194		nage Size = 194 n	
44		10	16		-	4 bits of	Hor Image Size 4	- 4 bits of Ver
45	_	00	0		0		Hor Border (pix	els)
46		00	0		0		Vertical Border (L	ines)
47		1A	26				Refer to right ta	ble

R2010-6053-O(3/3)

A4(210 X 297)

28



BOE	PRODUCT GROUP	REV	ISSUE DATE
	TFT- LCD PRODUCT	2016.09.30	
SPEC. NUMBER	SPEC. TITLE NV156FHM-N61 Preliminary Product Sp	PAGE 29 OF 33	

40		00	_		I	1
48		00	0		0.0	OMHz Main clock
49		00	0		0	Han Asthon O
4A		00	0		0	Hor Active = 0
4B		00	0		0	Hor Blanking = 0
4C		00	0		-	4 bits of Hor. Active + 4 bits of Hor. Blanking
4D		00	0		0	Ver Active = 0
4E		00	0		0	Ver Blanking = 0
4F	Detailed	00	0		-	4 bits of Ver. Active + 4 bits of Ver. Blanking
50	timing/monitor	00	0		0	Hor Sync Offset = 0
51	descriptor #2	00	0		0	H Sync Pulse Width = 0
52		00	0		0	V sync Offset = 0 line
53		00	0		0	V Sync Pulse width: 0 line
54		00	0		0	Horizontal Image Size = 0 mm (Low 8 bits)
55		00	0		0	Vertical Image Size = 0 mm (Low 8 bits)
56		00	0		-	4 bits of Hor Image Size + 4 bits of Ver Image Size
57		00	0		0	Hor Border (pixels)
58		00	0		0	Vertical Border (Lines)
59		00	0			
5A		00	0			
5B		00	0	7		
5C		00	0			ASCII Data Sting Tag
5D		FE	254			
5E		00	0			
5F		42	66		В	
60		4F	79		0	
61		45	69		Е	
62	Detailed	20	32			
63	timing/monitor descriptor #3	43	67		С	
64	descriptor #3	51	81		Q	
65		0A	10			Manufacture name : BOECQ
66		20	32			7
67		20	32			7
68		20	32			7
69		20	32			7
6A		20	32			7
6B		20	32			7
				•	•	20



BOE	PRODUCT GROUP	REV	ISSUE DATE
	TFT- LCD PRODUCT	P1	2016.09.30
SPEC. NUMBER	SPEC. TITLE NV156FHM-N61 Preliminary Product Sp	PAGE 30 OF 33	

6C		00	0			
6D		00	0			
6E		00	0			Product Name Tag (ASCII)
6F		FE	254			
70		00	0			
71		4E	78		N	
72		56	86		V	
73	5	31	49		1	
74	Detailed	35	53		5	
75	timing/monitor descriptor #4	36	54		6	
76	descriptor #4	46	70		F	Model person NV1F/FUM N/1
77		48	72		Н	Model name: NV156FHM-N61
78		4D	77		М	
79		2D	45		-	
7A		4E	78		N	
7B		36	54		6	
7C		31	49		1	
7D		OA	10			
7E	Extension flag	00	0			
7F	Checksum	22	34	34	-	

A4(210 X 297)