	1			
BOE	THIS SPECIFICATION IS T REPRODUCED OR COPIE MUST BE RETURNED TO	THE PROPE	T THE WRITTEN PERMIS	
SPEC. NUMBER	PRODUCT GROUP	Rev.	ISSUE DATE	PAGE
	TFT-LCD	P0	2016.04.30	1 OF 36
	NT156 Preliminary Pro			
	D	ev. P0		S
Chongqing I	BOE OPTOELECT	RONIC	STECHNOLOG	Y CO.,LTD
				1
R2010-6053-O(1/3)				A4(210 X 297)

B	OE	PRODUCT GROUP	REV	ISSUE DATE			
	ΞL	TFT- LCD PRODUCT	P0	2016.4.30			
SPEC.	SPEC. NUMBER SPEC. TITLE NT156WHM-N50 Preliminary Product Specification						
		REVISION HISTORY					
REV.	ECN No.	DESCRIPTION OF CHANGES	DATE	PREPARED			
P0	-	Initial Release	2016.04.30	高亮			
				, , , , , , , , , , , , , , , , , , ,			
			0				
				2			
R2010-6	053-O(2/3)			 A4(210 X 297)			
	· · /						

BO	F	PRODUCT GROUP	REV	ISSUE DATE			
	P0	2014.04.30					
SPEC. NUM	PEC. NUMBER SPEC. TITLE NT156WHM-N50 Preliminary Product Specification						
		Contents					
No.		Items		Page			
	REVI	SION HISTORY		2			
	CONT	TENTS		3			
1.0	Genera	al Description		4			
2.0	Absolu	ate Maximum ratings	•	6			
3.0	Electri	cal specifications.		7			
4.0	Optica	l specifications.	~	10			
5.0	Interfa	Interface Connection					
6.0	Signal	Timing waveforms		19			
7.0	Signal	Timing waveforms of interface signal		21			
8.0	Input s	signals, Basic display colors & gray scale of color	S	23			
9.0	Power	sequence		24			
10.0	Conne	ctor description		25			
11.0	Mecha	nical Characteristics		26			
12.0	Reliab	Reliability Test					
13.0	Handli	Handling & Cautions.					
14.0	Label	Label					
15.0	Packin	g information		28			
16.0	Mecha	nical Outline Dimension		31			
17.0	EDID	Table		33			

R2010-6053-O(3/3)


ĸ		λ
		2
	-	

BOE	PRODUCT GROUP	REV	ISSUE DATE			
	TFT- LCD PRODUCT P0 2014.04.3					
SPEC. NUMBER	SPEC. NUMBER SPEC. TITLE NT156WHM-N50 Preliminary Product Specification					

1.0 GENERAL DESCRIPTION

1.1 Introduction

NT156WHM-N50 is a color active matrix TFT LCD module using amorphous silicon TFT's(Thin Film Transistors) as an active switching devices. This module has a 15.6 inch diagonally measured active area with HD resolutions (1366 horizontal by 768 vertical pixel array). Each pixel is divided into RED, GREEN, BLUE dots which are arranged in vertical Stripe and this module can display 262,144 colors. The TFT-LCD panel used for this module is a low reflection and higher color type. Therefore, this module is suitable for Notebook PC. The LED Driver for back-light driving is built in this model. All input signals are LVDS interface compatible.

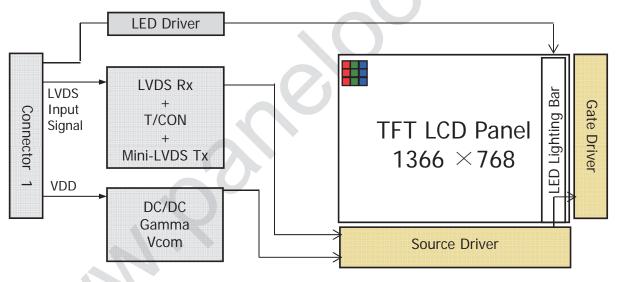

1.2 Features

- 1 Channel LVDS Interface with 1 pixel / clock
- Thin and light weight
- 6-bit color depth, display 262K colors
- Single LED Lighting Bar. (Down side/Horizontal Direction)
- Data enable signal mode
- Up/Down Mounting Frame
- Green Product (RoHS & Halogen free product)
- On board LED Driving circuit
- Low driving voltage and low power consumption
- On board EDID chip

R2010-6053-O(3/3)

A4(210 X 297)

4

 \bigotimes

BOE	PRODUCT GROUP	REV	ISSUE DAT	
	TFT- LCD PRODUCT	P0	2014.04.30	
SPEC. NUMBER	SPEC. TITLE NT156WHM-N50 Preliminary Product Sp	pecification	PAGE 5 OF 36	
1.3 Application			-	
 Notebook PC (With the second se	de type)			
			\sim	
1.4 General Specifica	ation			
The followings are ge	eneral specifications at the model NT156WH	IM-N50. (listed	in Table 1.)	
	Table 4. Openenal Openeification at			
	<table 1.="" general="" specifications=""></table>			
Parameter	Specification	Unit	Remarks	
Active area	344.23(H) ×193.54(V)	mm		
Number of pixels	1366 (H) ×768 (V)	pixels		
Pixel pitch	0.252 (H) X 0.252 (V)	mm		
Pixel arrangement	RGB Vertical stripe			
Display colors	262K	colors		
Display mode	Normally White			
Dimensional outline	359.32(H)*209.54(V) (W/PCB)*5.5(Ma	x) mm		
Weight	450 (max)	g		
Surface treatment	Glare			
Back-light	Lower Down side, 1-LED Lighting Bar ty	ире	Note 1	
Power consumption	PD : 1.2 (max)	W		
	PBL :2.3(max)	W		
			+	

Notes : 1. LED Lighting Bar (27*LED Array)

R2010-6053-O(3/3)

SPEC. NUMBER SPEC. TITLE PAGE NT156WHM-N50 Preliminary Product Specification 6 OF 36							
SPEC. NUMBER SPEC. TITLE NT156WHM-N50 Preliminary Product Specification PAGE 6 2.0 ABSOLUTE MAXIMUM RATINGS The followings are maximum values which, if exceed, may cause faulty operation or damage to the unit. The operational and non-operational maximum voltage and current values are listed in Table 2. Ta=25+/-2°C Parameter Symbol Min. Max. Unit Remarks Power Supply Voltage V _{DD} -0.3 4.0 V Note 1 Operating Temperature T _{OP} 0 +50 °C Note 2 Storage Temperature T _{ST} -20 +60 °C Note 2 Notes : 1. Permanent damage to the device may occur if maximum values are exceeded functional operation should be restricted to the condition described under normal operating conditions. 2. Temperature and relative humidity range are shown in the figure below. 95 % RH Max. (40 °C ≥ Ta) Maximum wet - bulb temperature at 39 °C or less. (Ta > 40 °C) No condensation. Note 1 Operating Range 90 90 90 90 90 90 90 90 90 90 90 90 90 90 90 90 90 90 <td< th=""><td>ROF</td><td></td><td></td><td>JI GRU</td><td>REV</td><td></td></td<>	ROF			JI GRU	REV		
NT156WHM-N50 Preliminary Product Specification 6 OF 36 2.0 ABSOLUTE MAXIMUM RATINGS The followings are maximum values which, if exceed, may cause faulty operation or damage to the unit. The operational and non-operational maximum voltage and current values are listed in Table 2. $< Table 2. Absolute Maximum Ratings> Ta=25+/-2°C Ta=25+/-2°C Parameter Symbol Min. Max. Unit Remarks Power Supply Voltage VIN VIS 0.3 4.0 V Note 1 Operating Temperature TOP 0 450 °C Note 1 Operating Temperature TOP 0 450 °C Note 2 Notes : 1. Permanent damage to the device may occur if maximum values are exceeded functional operation should be restricted to the condition described under normal operating conditions. 2. Temperature and relative humidity range are shown in the figure below. 95 % RH Max. (40 °C ≥ Ta) Maximum wet - bulb temperature at 39 °C or less. (Ta > 40 °C) No condensation. 10 Operating Range 0 0 0 0 0 0 0 0 0 0 0$	1) 22		TFT- LCD	PRODUCT		P0	2014.04.30
The followings are maximum values which, if exceed, may cause faulty operation or damage to the unit. The operational and non-operational maximum voltage and current values are listed in Table 2. $< Table 2. Absolute Maximum Ratings> Ta=25+/-2°C$ $\frac{Parameter Symbol Min. Max. Unit Remarks}{Power Supply Voltage V_{DD} -0.3 4.0 V} Note 1$ $\frac{V_{DD} -0.3 4.0 V}{Operating Temperature T_{OP} 0 +50 C} Note 2$ Notes : 1. Permanent damage to the device may occur if maximum values are exceeded functional operation should be restricted to the condition described under normal operating conditions. 2. Temperature and relative humidity range are shown in the figure below. 95 % RH Max. (40 °C ≥ Ta) Maximum wet - bulb temperature at 39 °C or less. (Ta > 40 °C) No condensation.	SPEC. NUMBER) Prelimina	ry Product Sp	ecification	
damage to the unit. The operational and non-operational maximum voltage and current values are listed in Table 2. $< Table 2. Absolute Maximum Ratings> Ta=25+/-2°C$ $\boxed{Parameter Supply Voltage V_{DD} -0.3 4.0 V}_{DD} Note 1$ $\boxed{Power Supply Voltage V_{IN} V_{ss}-0.3 V_{DD}+0.3 V}_{Operating Temperature T_{OP} 0 +50 °C}_{Operating Temperature T_{ST} -20 +60 °C}_{Operating conditions}.$ Notes : 1. Permanent damage to the device may occur if maximum values are exceeded functional operation should be restricted to the condition described under normal operating conditions. 2. Temperature and relative humidity range are shown in the figure below. 95 % RH Max. (40 °C ≥ Ta) Maximum wet - bulb temperature at 39 °C or less. (Ta > 40 °C) No condensation.	2.0 ABSOLUTE	MAXIM		GS			
ParameterSymbolMin.Max.UnitRemarksPower Supply Voltage V_{DD} -0.34.0VNote 1Logic Supply Voltage V_{IN} V_{ss} -0.3 V_{DD} +0.3VNote 1Operating Temperature T_{OP} 0+50 \mathbb{C} Note 2Storage Temperature T_{ST} -20+60 \mathbb{C} Note 2Notes : 1. Permanent damage to the device may occur if maximum values are exceeded functional operation should be restricted to the condition described under normal operating conditions.2. Temperature and relative humidity range are shown in the figure below. 95 % RH Max. (40 $^{\circ}C \ge Ta$) Maximum wet - bulb temperature at 39 $^{\circ}C$ or less. (Ta > 40 $^{\circ}C$) No condensation.Relative Humudity 100100(40, 95)90(40, 95)010000Note 2	damage to the u	unit. The	operational a				
Power Supply Voltage V_{DD} -0.34.0VNote 1Logic Supply Voltage V_{IN} V_{ss} -0.3 V_{DD} +0.3VNote 1Operating Temperature T_{OP} 0+50 $^{\circ}C$ Note 2Storage Temperature T_{ST} -20+60 $^{\circ}C$ Note 2Notes : 1. Permanent damage to the device may occur if maximum values are exceeded functional operation should be restricted to the condition described under normal operating conditions.2. Temperature and relative humidity range are shown in the figure below. 95 % RH Max. (40 $^{\circ}C \ge Ta$) Maximum wet - bulb temperature at 39 $^{\circ}C$ or less. (Ta > 40 $^{\circ}C$) No condensation.Relative Humudity100(40. $^{\circ}C$)Operating Range0Operating Range(40. $^{\circ}C$)No condensation.			< Table 2. Ab	solute Max	mum Ratings	>	Ta=25+/-2°C
Instruct Supply Voltage VIN Value Instruct of the second	Parameter		Symbol	Min.	Max.	Unit	Remarks
Logic Supply Voltage V_{IN} V_{ss} -0.3 V_{DD} +0.3 V Operating Temperature T_{OP} 0+50 $^{\circ}$ CNote 2Storage Temperature T_{ST} -20+60 $^{\circ}$ CNote 2Notes : 1. Permanent damage to the device may occur if maximum values are exceeded functional operation should be restricted to the condition described under normal operating conditions.2.Temperature and relative humidity range are shown in the figure below.95 % RH Max. (40 $^{\circ}$ C \geq Ta) Maximum wet - bulb temperature at 39 $^{\circ}$ C or less. (Ta > 40 $^{\circ}$ C) No condensation.Relative Humudity $\frac{100}{90}$ <td>Power Supply Volt</td> <td>age</td> <td>V_{DD}</td> <td>-0.3</td> <td>4.0</td> <td>V</td> <td></td>	Power Supply Volt	age	V _{DD}	-0.3	4.0	V	
Image: TemperatureT ST-20+60 $^{\circ}$ CNote 2Notes : 1. Permanent damage to the device may occur if maximum values are exceeded functional operation should be restricted to the condition described under normal operating conditions.222. Temperature and relative humidity range are shown in the figure below. 95 % RH Max. (40 $^{\circ}$ C \geq Ta) Maximum wet - bulb temperature at 39 $^{\circ}$ C or less. (Ta > 40 $^{\circ}$ C) No condensation.Note 2Relative Humudity 10090<	Logic Supply Volta	ge		V _{ss} -0.3	V _{DD} +0.3	V	Note 1
Storage Temperature T_{ST} -20+60 $^{\circ}C$ Notes : 1. Permanent damage to the device may occur if maximum values are exceeded functional operation should be restricted to the condition described under normal operating conditions.2.2. Temperature and relative humidity range are shown in the figure below. 95 % RH Max. (40 $^{\circ}C \ge Ta$) Maximum wet - bulb temperature at 39 $^{\circ}C$ or less. (Ta > 40 $^{\circ}C$) No condensation.Relative Humudity 100 90 100 90 $^{(40, 95)}$ $^{(50, 80)}$ 100 90 Operating Range 100 90 100 90 100 90 90 90 <tr< th=""><td>Operating Tempera</td><td>ature</td><td>T_{OP}</td><td>0</td><td>+50</td><td>°C</td><td>Nete O</td></tr<>	Operating Tempera	ature	T _{OP}	0	+50	°C	Nete O
Notes : 1. Permanent damage to the device may occur if maximum values are exceeded functional operation should be restricted to the condition described under normal operating conditions. 2. Temperature and relative humidity range are shown in the figure below. 95 % RH Max. ($40 \ ^{\circ}C \ge Ta$) Maximum wet - bulb temperature at 39 °C or less. (Ta > 40 °C) No condensation. Relative Humudity $100 \ 00 \ ^{\circ}Operating Range$ $00 \ ^{\circ}Operating Range$	Storage Temperati	ure	T _{ST}	-20	+60	°C	Note 2
	2. Temperatu 95 % RH I	ure and re Max. (40 wet - bu Relati	elative humid) °C ≥ Ta) Ilb temperatu ive Humuditv ¹⁰⁰ [90 ₈₀ -	ure at 39 ^O	C or less. (Ta	> 40 ^o C) N 0, 80)	


lobal LCD Panel Exchar	www.pane	elook.com		屏库 :全	球液	·晶屏交易中心	\Diamond		
									_
BOE	RODU	ICT GF	ROUP		REV		ISSUE DATE		
		TFT- LCI	D PRODL	ICT		P0		2014.04.30	-
SPEC. NUMBER	50 Prelim	inary Proc	duct Sp	ecification		PAGE 7 OF 36			
3.0 ELECTRICAL 3.1 Electrical Sp	NS								
	<	Table 3. I	Electrical	specificati	ions >		Т	a=25+/-2°C	
Paran		Min.	Тур.	Max.	Unit		Remarks		
Power Supply Voltage V _{DD}			3.0	3.3	3.6	V		Note 1	
Permissible Input Ripple V _{RF}			-	-	100	mV	A	at $V_{DD} = 3.3V$	

Parameter		Min.	Тур.	Max.	Unit	Remarks
Power Supply Voltage	V_{DD}	3.0	3.3	3.6	V	Note 1
Permissible Input Ripple Voltage	V_{RF}	-	-	100	mV	At V _{DD} = 3.3V
Power Supply Current	I _{DD}	_	300	-	mA	Note 1
Inrush Current	l _{inrush}	-	569	700	mA	
Differential Input Voltage	$V_{\rm ID}$	100	Y	600	mV	
	P _D	K	0.9	1.2	W	Note 1
Power Consumption	P _{BL}	-	-	2.3	W	Note 2
	P _{total}	-	-	3.5	W	
LVDS Common Mode Voltage	V _{IC}	0.7	-	1.6	V	

Notes : 1. The supply voltage is measured and specified at the interface connector of LCM. The current draw and power consumption specified is for 3.3V at 25°C.

- a) Typ : Mosaic Pattern
- b) Max : Skip sub pixel255
- 2. Calculated value for reference (VLED \times ILED)



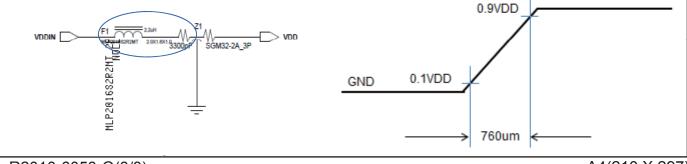

R2010-6053-O(3/3)


 \bigotimes

BOE			RODU	JCT GF	ROUP		REV	ISSUE DATE
			TFT- LC	D PRODL	JCT		P0	2014.04.30
SPEC. NUMB	ER		. TITLE 6WHM-N	I50 Prelim	inary Proc	duct Spe	ecification	PAGE 8 OF 36
3.2 Backli	-	nit ble 4. LED	Driving g	guideline s	pecificatio	ons >		Ta=25+/-2°C
	Param	neter		Min.	Тур.	Max.	Unit	Remarks
LED Forward	l Volta	ge	V _F	-	-	3.2	V	\sim
LED Forward	l Curre	nt	۱ _F	-	22.5	-	mA	-
LED Power C	Consun	nption	P_{LED}		-	2.3	W	Note 1
LED Life-Tim	е		N/A	15,000	-	-	Hour	l⊧ = 20mA
Power supply voltage for LED Driver			V_{LED}	5	12	21	V	
LED Power Input Current			I _{LED IN}	-	192)-	mA	
LVDS Common Mode Voltage		V _{core}	0.7	1.2	1.6	V		
Maximum de clock frequer			Fdev	2	±3%	-		
Maximum mo ncy of input o SSC			Fмоd	10	-	300	KHZ	
EN Control	Bac	klight on		2.5		5.0	V	
Level	Вас	klight off		0		1.0	V	
PWM Control Level PWM Low Level				2.5		5.0	V	
			0		0.1	V		
PWM Control Frequency			F _{PWM}	100	-	10,000) Hz	
Duty Ratio			-	1	-	100	%	Note3
2. The	ulator LED L	Value for r	eference efine as t	IF imes VF imes	×27/ effic ted time t	o 50% d		of initial luminou

3. 1% duty cycle is achievable with a dimming frequency less than 1KHz. 8

R2010-6053-O(3/3)

 \Diamond

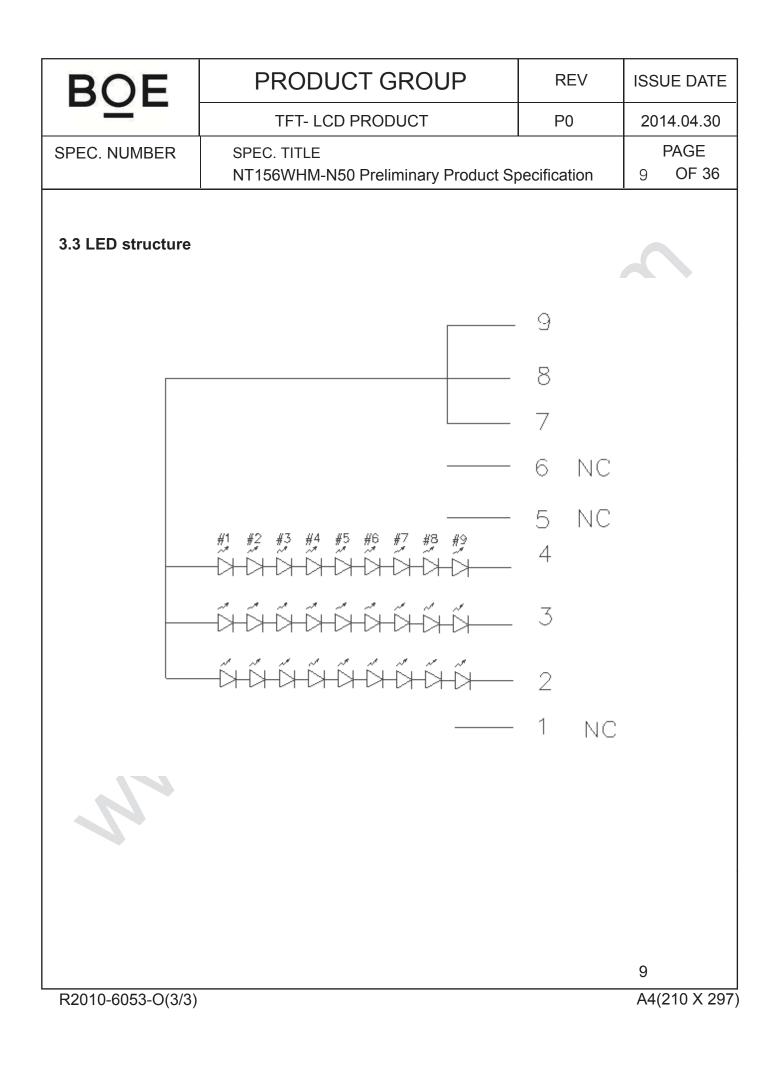

Ċ

BOE	PRODUCT GROUP	REV	ISSUE DATE					
	TFT- LCD PRODUCT	TFT- LCD PRODUCT P0						
SPEC. NUMBER	SPEC. TITLE NT156WHM-N50 Preliminary Product Sp	pecification	PAGE 10 OF 36					

4.0 OPTICAL SPECIFICATION

4.1 Overview

The test of Optical specifications shall be measured in a dark room (ambient luminance ≤ 1 lux and temperature = $25\pm2^{\circ}$ C) with the equipment of Luminance meter system (Goniometer system and TOPCON BM-5) and test unit shall be located at an approximate distance 50cm from the LCD surface at a viewing angle of θ and Φ equal to 0°. We refer to $\theta \emptyset = 0$ (= $\theta 3$) as the 3 o'clock direction (the "right"), $\theta \emptyset = 90$ (= $\theta 12$) as the 12 o'clock direction ("upward"), $\theta \emptyset = 180$ (= $\theta 9$) as the 9 o'clock direction ("left") and $\theta \emptyset = 270$ (= $\theta 6$) as the 6 o'clock direction ("bottom"). While scanning θ and/or \emptyset , the center of the measuring spot on the Display surface shall stay fixed. The backlight should be operating for 30 minutes prior to measurement. VDD shall be 3.3+/- 0.3V at 25°C. Optimum viewing angle direction is 6 'clock.

4.2 Optical Specifications


Paramo	eter	Symbol	Condition	Min.	Тур.	Max.	Unit	Remark
	Horizontal	Θ ₃		-	45	-	Deg.	
Viewing Angle	TIONZONIAI	Θ ₉	CR > 10	-	45	-	Deg.	Note 1
range	Vertical	Θ ₁₂		-	20	-	Deg.	NOLE I
	Ventical	Θ_6	·	-	40	-	Deg.	
Luminance Co	ntrast ratio	CR	$\Theta = 0^{\circ}$	-	500			Note 2
Luminance of White	5 Points	Y _w	Θ = 0°	187	220	-	cd/m ²	Note 3
White	5 Points	ΔΥ5	0 = 0 ILED = 22.5mA	80	-	-		
Luminance uniformity	13 Points	ΔΥ13		65	-	-		Note 4
White Chro	maticity	X _w	Θ = 0°	0.283	0.313	0.343		Note 5
White Child	maticity	y _w	0 = 0	0.299	0.329	0.359		Note 5
	Red	X _R			0.590			
	Red	У _R			0.350			
Reproduction	Green	X _G	Θ = 0°	-0.03	0.330	+0.03		
of color		У _G	0 - 0	-0.05	0.555	10.00		
	Blue	X _R			0.153			
	Dide	У _В			0.119			
Gamut					45		%	
Response Time (Rising + Falling)		T _{RT}	Ta= 25° C Θ = 0°	-	12	-	ms	Note 6
Cross 7	alk	СТ	$\Theta = 0^{\circ}$	-	-	2.0	%	Note 7
							10	


<Table 5. Optical Specifications>


R2010-6053-O(3/3)

2		
<	F	D
	-	<u> </u>

BOE	PRODUCT GROUP	REV	ISSUE DATE		
DZL	TFT- LCD PRODUCT	P0	2014.04.30		
SPEC. NUMBER	SPEC. TITLE NT156WHM-N50 Preliminary Product Sp	SPEC. TITLE NT156WHM-N50 Preliminary Product Specification			
angles are dete o'clock direction FIGURE 1). 2. Contrast mea the LCD surface white, then to th	e is the angle at which the contrast ratio is gr rmined for the horizontal or 3, 9 o'clock direct with respect to the optical axis which is norr asurements shall be made at viewing angle of e. Luminance shall be measured with all pixe be dark (black) state.	ion and the ve nal to the LCE Θ= 0 and at t Is in the view	ertical or 6, 12 D surface (see the center of field set first to		
(see FIGURE 1) Luminance Contrast Ratio (CR) is defined m Luminance when displaying a white r				
	Luminance when displaying a black r				
the LCD surface	nance of white is defined as luminance values e. Luminance shall be measured with all pixel surement shall be taken at the locations show nts per display.	s in the view f	ield set first to		
	minance uniformity on LCD surface is then ex (or 13) points / Maximum Luminance of 5(or and FIGURE 3).	•	\Y =Minimum		
(see FIGURE 2	,				
5. The color ch spectral data m	romaticity coordinates specified in Table 5 sha easured with all pixels first in red, green, blue at the center of the panel.				
5. The color ch spectral data m shall be made a 6. The electro-c switching the "d	romaticity coordinates specified in Table 5 sha easured with all pixels first in red, green, blue	and white. Mo	easurements JRE 4 by		
 5. The color ch spectral data m shall be made a 6. The electro-o switching the "d change from 10 7. Cross-Talk of the luminance (romaticity coordinates specified in Table 5 sha easured with all pixels first in red, green, blue at the center of the panel. ptical response time measurements shall be ata" input signal ON and OFF. The times nee % to 90% is Tr, and 90% to 10% is Td. f one area of the LCD surface by another shall YA) of a 25mm diameter area, with all display YB) of that same area when any adjacent are	and white. Me made as FIGU ded for the lur I be measured pixels set to a	easurements JRE 4 by ninance to d by comparing a gray level, to		

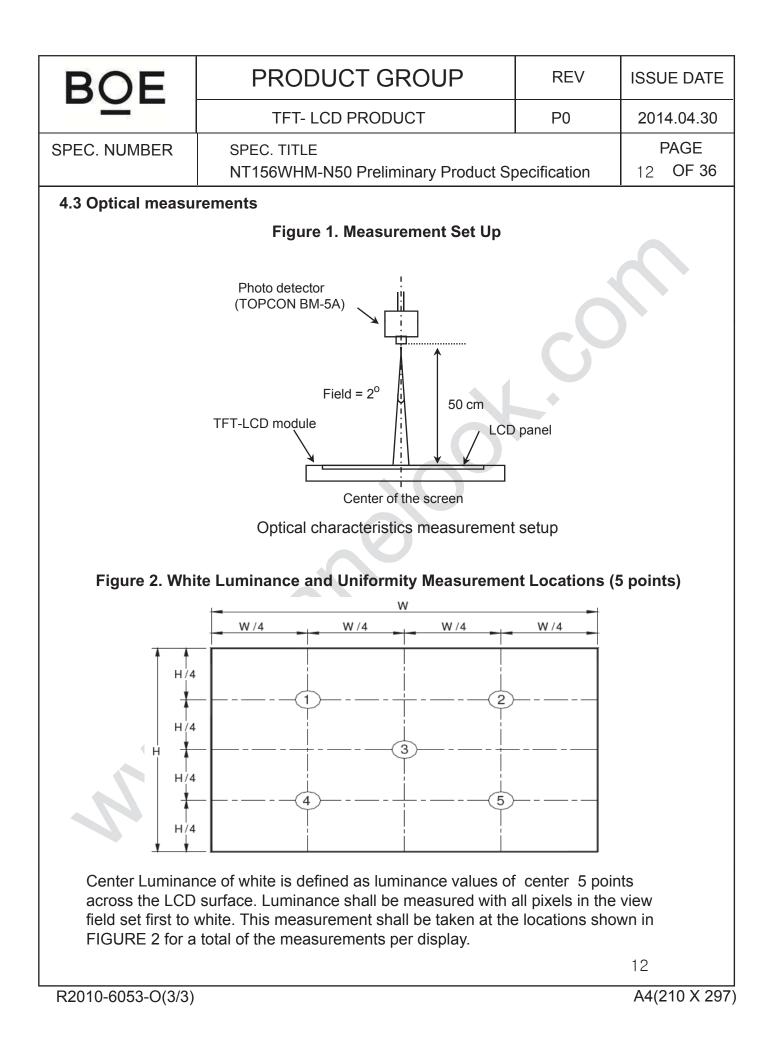

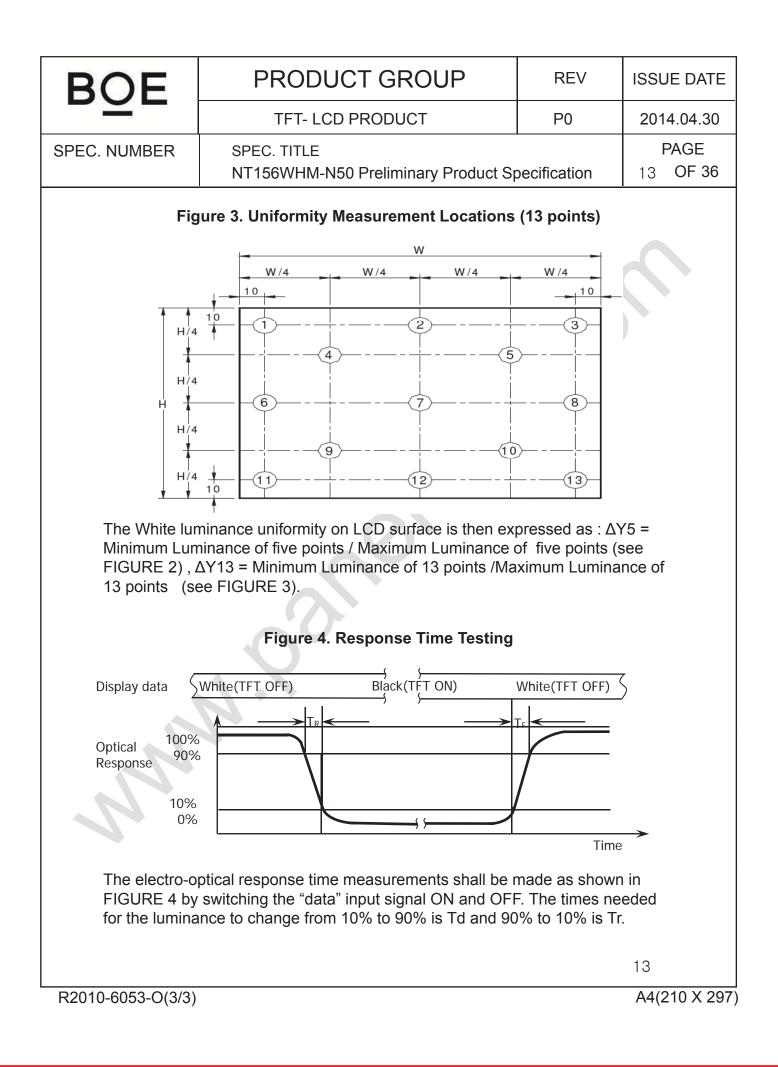

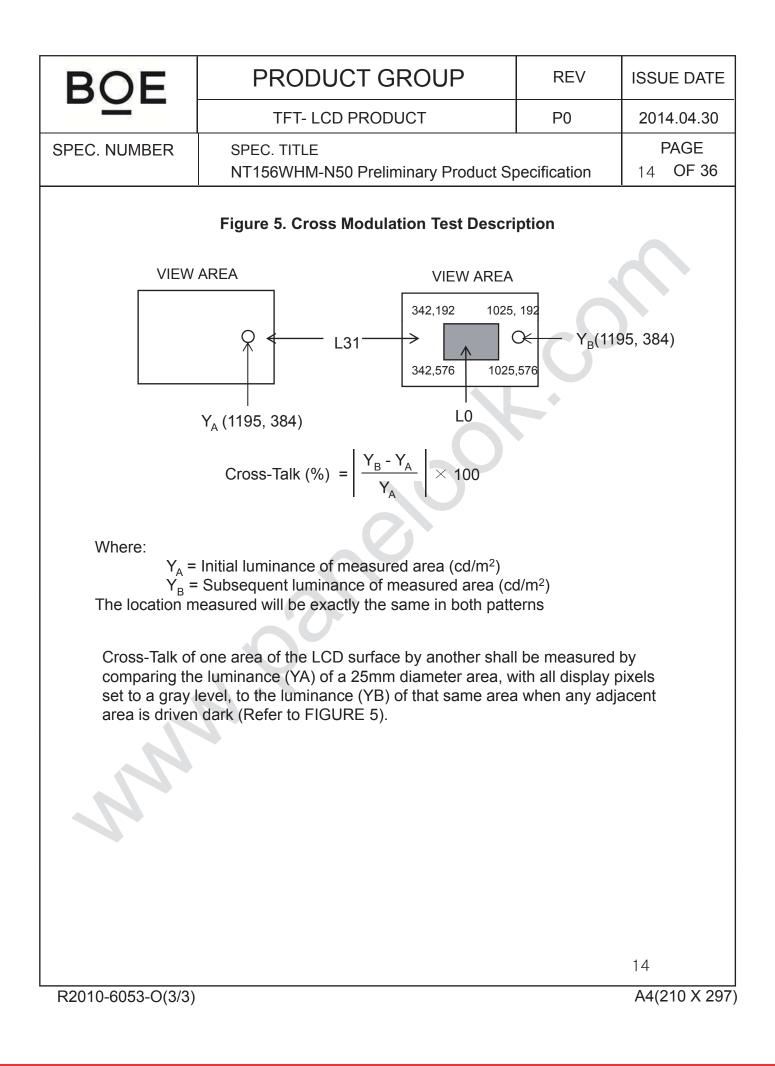

BOE	PRODUCT GROUP		REV	ISSUE DATE				
	TFT- I	TFT- LCD PRODUCT		2014.04.30				
SPEC. NUMBER	SPEC. TITLE			PAGE				
	NT156WHM	I-N50 Preliminary Product Sp	pecification	15 OF 36				
5.0 INTERFACE								
5.1 Electrical Inter		•						
	The electronics interface connector is STM MSAK24025P40G or Compatible.							
The connector i	The connector interface pin assignments are listed in Table 6.							
	<table 6.="" ass<="" pin="" td=""><td>ignments for the Interface Co</td><td>onnector></td><td></td></table>	ignments for the Interface Co	onnector>					
Terminal	Symbol	Functi	ons					
Pin No.	Symbol	Descrip	otion					
1	NC	No Connection						
2	VDDIN	Power Supply, 3.3V (typ.)						
3	VDDIN	Power Supply, 3.3V (typ.)						
4	VDC	VDC 3.3Vpower for EDID						
5	NC	No Connection	*					
6	CLK EDID	EDID Clock						
7	Data EDID	EDID Data						
8	RxIN0-	Transmission Data of 0 Negative						
9	RxIN0+	Transmission Data of 0 Positive +						
10	GND	Ground						
11	RxIN1-	Transmission Data of 1 Negative						
12	RxIN1+	Transmission Data of 1 Positive	+					
13	GND	Ground						
14	RxIN2-	Transmission Data of 2 Negative -						
15	RxIN2+	Transmission Data of 2 Positive	+					
16	GND	Ground						
17	RxCLKIN-	Sampling Clock of Negative -						
18	RxCLKIN+	Sampling Clock of Positive +						
19	NC	No Connection						
20	NC	No Connection						
21 22	NC	No Connection						
22	GND	Ground No Connection						
23	NC NC	No Connection						
24	GND	Ground						
25	(CE)	No Connection						
20	(CE) (CTL)	No Connection						
28	GND	Ground						
29	NC	No Connection						
30	NC	No Connection						
	-			15				

R2010-6053-O(3/3)


	<	\mathcal{P}	
_	_	_	-


BOE	BOE PRODUCT GROUP REV		ISSUE DATE
	TFT- LCD PRODUCT	P0	2014.04.30
SPEC. NUMBER	SPEC. TITLE NT156WHM-N50 Preliminary Product Sp	pecification	PAGE 16 OF 36

Terminal	Symbol	Functions		
Pin No.	Symbol	Description		
31	VLED_GND	LED Ground		
32	VLED_GND	LED Ground		
33	VLED_GND	LED Ground		
34	NC	No Connection		
35	PWM	System PWM Signal Input		
36	LED_EN	LED enable pin(+3.3V Input)		
37	NC	No Connection		
38	VLED	LED Power Supply 6V-21V		
39	VLED	LED Power Supply 6V-21V		
40	VLED	LED Power Supply 6V-21V		

16

R2010-6053-O(3/3)

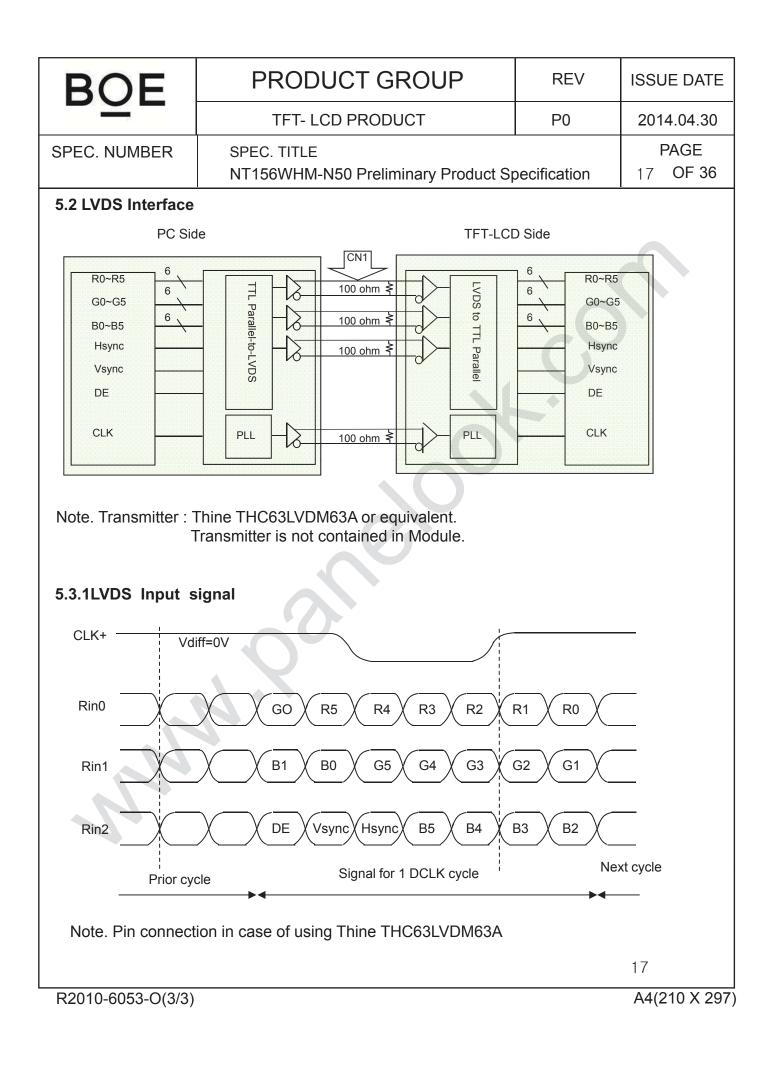

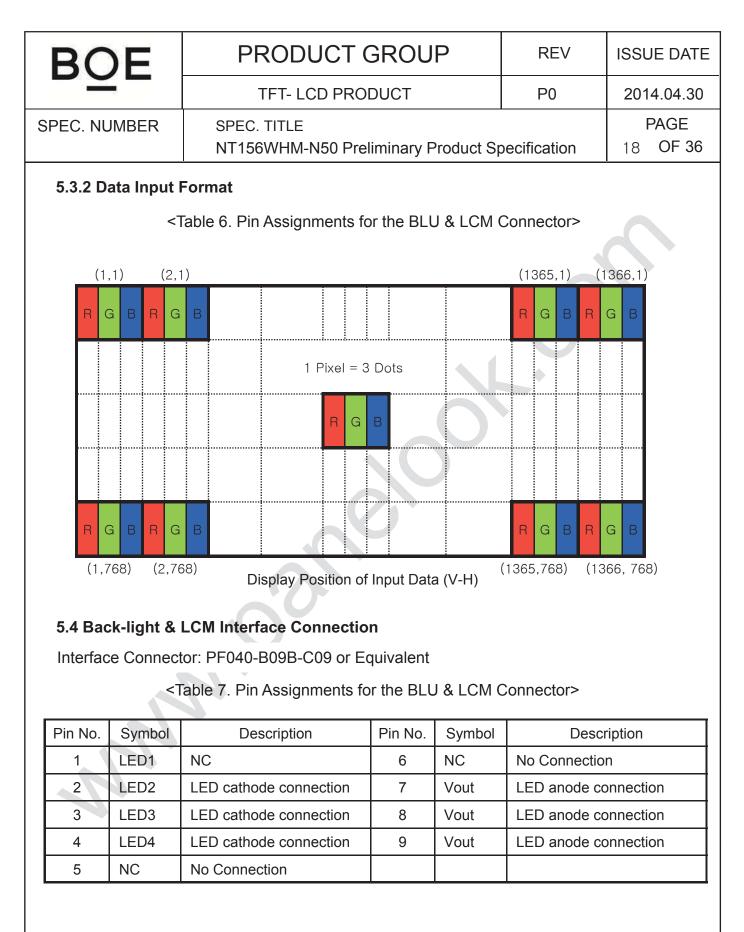

18

R2010-6053-O(3/3)

BOE	PRODUCT GROUP REV		ISSUE DATE
	TFT- LCD PRODUCT	P0	2014.04.30
SPEC. NUMBER	SPEC. TITLE		PAGE
	NT156WHM-N50 Preliminary Product Sp	pecification	19 OF 36

6.0 SIGNAL TIMING SPECIFICATION


6.1 The NT156WHM-N50 is operated by the DE only.


	Item	Symbols	Min	Тур	Max	Unit
	Frequency	1/Tc	67.5	72.3	76.3	MHz
Clock	High Time	Tch	-	4/7		Тс
	Low Time	Tcl	-	3/7	-	Тс
			778	790	802	lines
Fra	Frame Period		-	60	-	Hz
			-	16.7	-	ms
Vertical	Display Period	Tvd	768	768	768	lines
One I	line Scanning Period	Th	1446	1526	1586	clocks
Horiz	ontal Display Period	Thd	1366	1366	1366	clocks


Note^{**}: This Module can support low frame refresh rate 50Hz & 40Hz.

19

R2010-6053-O(3/3)

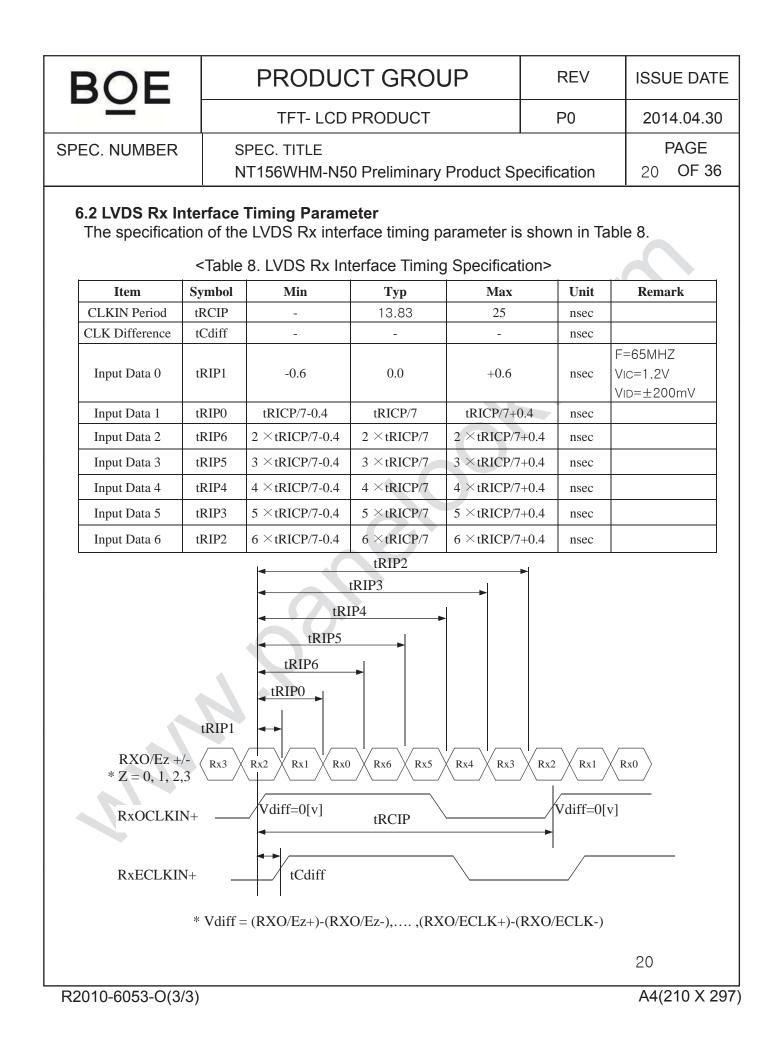

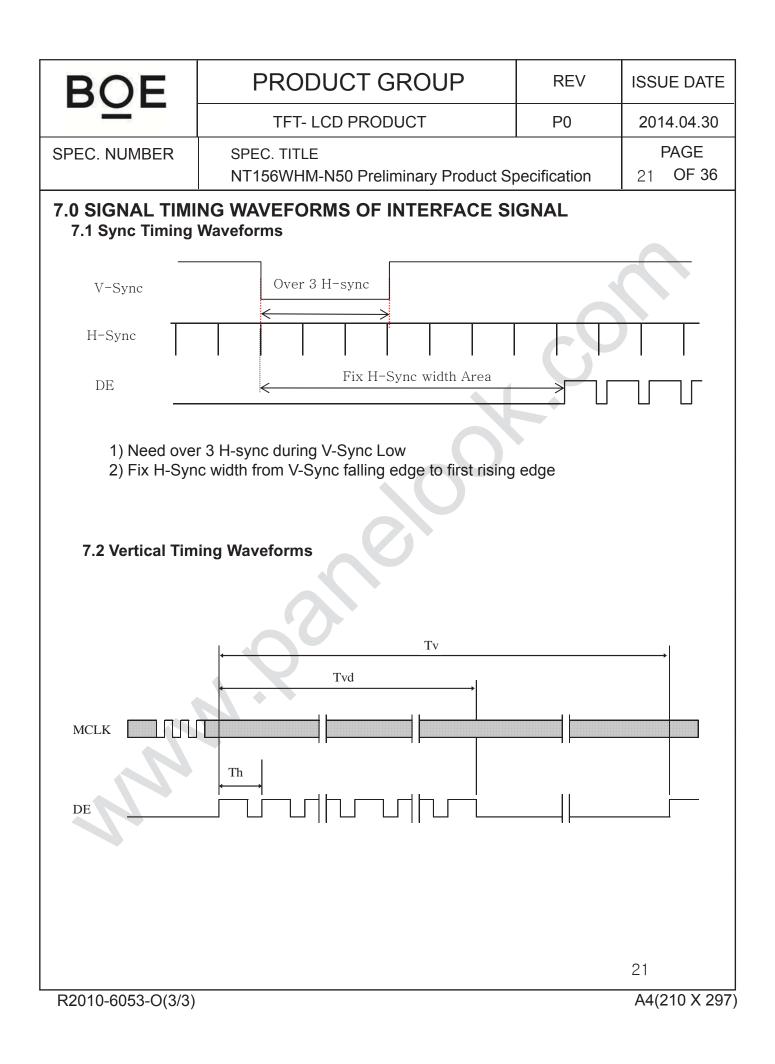

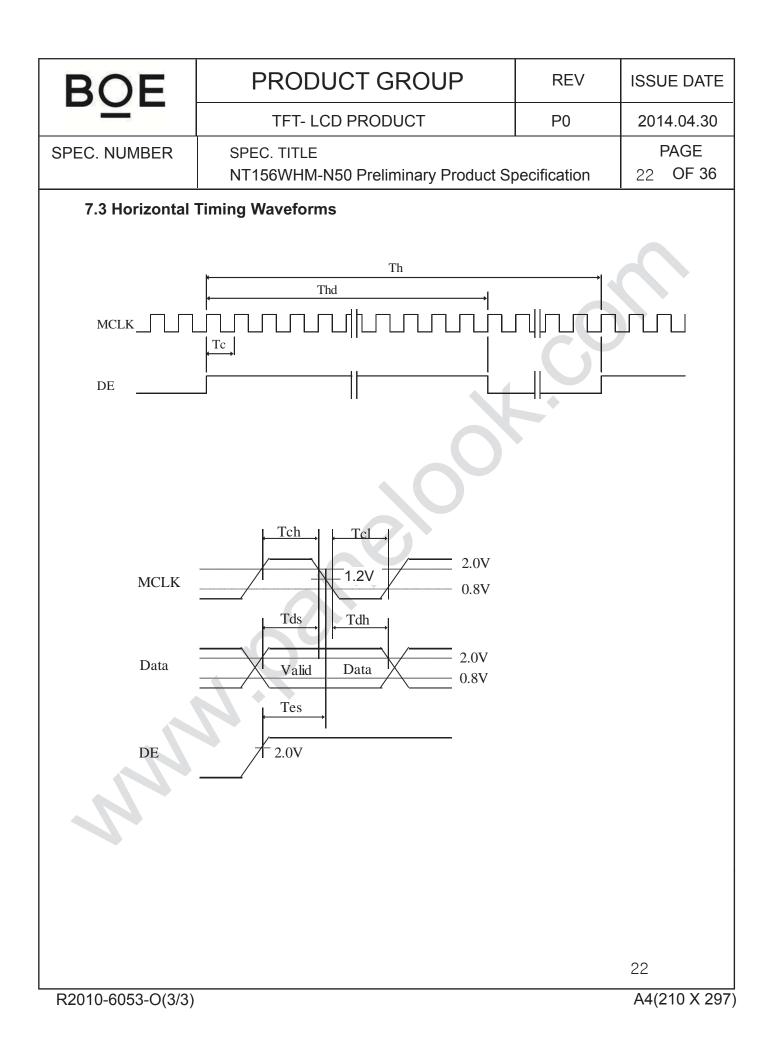

(P	

BOE			PRODUCT GROUP		REV	ISSUE DATE	
			TFT- LCD PRODUCT P0 2014.04.30				
S	PEC. NUMBI	ER	SPEC. TITLEPAGENT156WHM-N50 Preliminary Product Specification23OF 36				
8.	.0 INPUT S	SIGNAL	S, BASIC DISPLAY	COLORS & GR	AY SCALE	OF COLORS	
		Colors &		Data signal			
		Gray scale	R0 R1 R2 R3 R4 R5	G0 G1 G2 G3 G4 G	65 B0 B1 B	2 B3 B4 B5	
		Black	0 0 0 0 0 0	0 0 0 0 0 0	0 0 0	0 0 0	
		Blue	0 0 0 0 0 0	0 0 0 0 0 0	1 1 1	1 1 1	
	Basic	Green	0 0 0 0 0 0	1 1 1 1 1 1	0 0 0	0 0 0	
	colors	Light Blue	0 0 0 0 0 0	1 1 1 1 1 1	1 1 1		
		Red	1 1 1 1 1 1	0 0 0 0 0 0	0 0 0		
		Purple	1 1 1 1 1 1	0 0 0 0 0 0	1 1 1		
		Yellow	1 1 1 1 1 1	1 1 1 1 1 1	0 0 0		
		White		1 1 1 1 1 1			
			0 0 0 0 0 0	0 0 0 0 0 0	0 0 0		
		 Darker	1 0 0 0 0 0 0 1 0 0 0 0	000000			
	Gray scale		<u> </u>		000	↑ 0 0 0 1	
	of Red						
	ornou	Brighter		0 0 0 0 0 0	0 0 0		
			0 1 1 1 1 1	0 0 0 0 0 0	0 0 0		
		Red	1 1 1 1 1 1	0 0 0 0 0 0	0 0 0	0 0 0	
		Black	0 0 0 0 0 0	0 0 0 0 0 0	0 0 0	0 0 0	
		Δ	0 0 0 0 0 0	1 0 0 0 0 0	0 0 0	0 0 0	
		Darker	0 0 0 0 0 0	0 1 0 0 0 0	0 0 0	0 0 0	
	Gray scale		Î	Î Î		↑ III	
	of Green					↓	
		Brighter	0 0 0 0 0 0	1 0 1 1 1 1	0 0 0		
			0 0 0 0 0 0		0 0 0		
		Green			0 0 0		
				0000000			
		 Darker			0 1 0		
1		Daikei			010		

↓

0 0 0 0

0 0 0

î

0 0 0 0 0 0

0

0 0 0 0 0 0

0 0 0

1

0 1 0 0 0 0

1 0 1 1 1 1

0 1 1 1 1 1

1

0

0 0 0 0 0

1

1 1 1 1

23

Î

Ţ

1 0 1 1 1 1

0 1 1 1 1 1

1 1 1 1 1 1

0 0 0 0 0

1

0 1 0 0 0 0

1 0 1 1 1 1

0 1 1 1 1 1

1 1

0 0 0 0

1 1 1

R2010-6053-O(3/3)

Gray scale

of Blue

Gray

scale

of

White &

Black

 Δ

 ∇

Brighter

 ∇

Blue

Black

 \triangle

Darker

Δ

 ∇

Brighter

 ∇

White

A4(210 X 297)

0

0

1

1

0 0

0

0 0

1

1

0

î

0

0 0 0 0 0 0

0 0

0 0 0 0 0 0

0 0 0

1

0 1 0 0 0 0

1 0 1 1 1 1


0 1 1 1 1 1

1

0 0 0 0 0


1

1 1

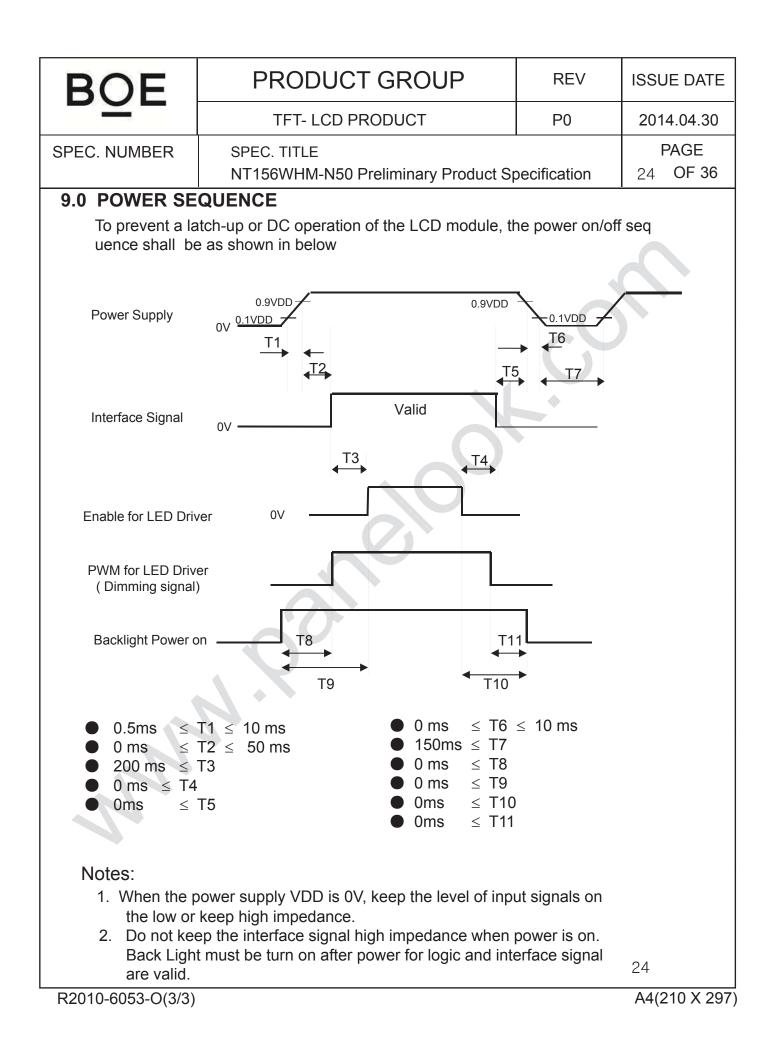

PRODUCT GROUP	REV	ISSUE DATE
TFT- LCD PRODUCT	P0	2014.04.30
SPEC. TITLE NT156WHM-N50 Preliminary Product Sp	pecification	PAGE 25 OF 36
	TFT- LCD PRODUCT SPEC. TITLE	TFT- LCD PRODUCT P0

9.1 Momentary voltage

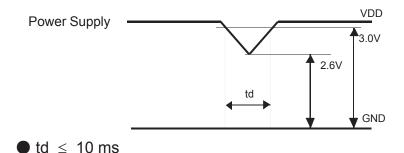

Notes:

When momentary voltage VDD \ge 2.6V during td, the unit can work normally when VDD return to 3.0V.

10.0 Connector Description

Physical interface is described as for the connector on LCM. These connectors are capable of accommodating the following signals and will be following components.

10.1 TFT LCD Module

Connector Name /Description	For Signal Connector
Manufacturer	STM or Compatible
Type/ Part Number	MSAK24025P40G or Compatible
Mating housing/ Part Number	I-PEX 20455-040T-11 or Compatible

25

R2010-6053-O(3/3)

BOE		PRODUCT GROUP	REV	ISSUE DATE						
		TFT- LCD PRODUCT	P0	2014.04.30						
SPEC. NUMBER		SPEC. TITLE NT156WHM-N50 Preliminary Product Sp	pecification	PAGE 26 OF 36						
11.0 MECHANI	CAL	CHARACTERISTICS								
11.1 Dimensional Requirements										
FIGURE 6 sho	vs me	echanical outlines for the model NT156WH e shown in Table 9.	M-N50.							
		<table 9.="" dimensional="" parameters=""></table>	\sim							
Parameter	,	Specification		Unit						
Active Area	l	344.23 (H) ×193.54(V)								
Number of pix	els	1366 (H) X 768 (V) (1 pixel = R + G	i + B dots)							
Pixel pitch		0.252 (H) X 0.252 (V)	*							
Pixel arrangen	nent	RGB Vertical stripe								
Display colo	Display colors 262K									
Display mod	Display mode Normally white									
Dimensional ou	Dimensional outline 359.32(H)*209.54 (V) (W/PCB)*5.5(Max)									
Weight		450g(Max)		gram						
Pook Light		Connector :PF040-B09B-C	09							
Back Light		LED, Horizontal-LED Array t	уре							
	11.2 Mounting See FIGURE 6.									
11.3 Glare and	d Pola	arizer Hardness.								
	The surface of the LCD has an glare coating to maximize readability and hard coating to reduce scratching.									
11.4 Light Lea	11.4 Light Leakage									
		isible light from the back-lighting system an a distance 50cm from the screen with an								
				26						
R2010-6053-O(3	(3)			A4(210 X 297						

BOE)F	PRODUCT	REV	ISSUE DATE			
	TFT- LCC			ODUCT	2014.04.30			
S	PEC. N	UMBER	SPEC. TITLE NT156WHM-N50 Pr	eliminary Product Sp	PAGE 27 OF 36			
12.0 RELIABILITY TEST The Reliability test items and its conditions are shown in below.								
			<table 10.="" i<="" td=""><td>Reliability test></td><td></td><td></td></table>	Reliability test>				
l	No		Test Items	Conditions				
	1	High temp	erature storage test	Ta = 60 ℃, 240 hrs				
	2	Low tempe	erature storage test	Ta = -20 °C, 240 hrs				
	3	High temp operation	erature & high humidity test	Ta = 50 ℃, 80%RH, 240 hrs				
	4	High temp	erature operation test	Ta = 50 ℃, 240 hrs				
	5	Low tempe	erature operation test	Ta = 0 °C, 240 hrs				
	6	Thermal s	hock	Ta = -20 $^{\circ}$ C \leftrightarrow 60 $^{\circ}$ C (0.5 hr), 100 cycle				
	7	Vibration t (non-opera		1.5G, 10~500Hz,Half Sine X,Y,Z / Sweep rate : 1 hour				
	8	Shock test (non-opera		220G, Half Sine Wave 2msec $\pm X, \pm Y, \pm Z$ Once for each direction				
	9	Electro-sta (non-opera	atic discharge test ating)	Air : 150 pF, 3 Contact : 150 pF,	330Ω, 15 KV 330Ω, 8 KV			

13.0 HANDLING & CAUTIONS


- (1) Cautions when taking out the module
- Pick the pouch only, when taking out module from a shipping package.
- (2) Cautions for handling the module
 - As the electrostatic discharges may break the LCD module, handle the LCD module with care. Peel a protection sheet off from the LCD panel surface as slowly as possible.
 - As the LCD panel and back light element are made from fragile glass material, impulse and pressure to the LCD module should be avoided.
 - As the surface of the polarizer is very soft and easily scratched, use a soft dry cloth without chemicals for cleaning.
 - Do not pull the interface connector in or out while the LCD module is operating.
 - Put the module display side down on a flat horizontal plane.
 - Handle connectors and cables with care.
- (3) Cautions for the operation
 - When the module is operating, do not lose CLK, ENAB signals. If any one of these signals is lost, the LCD panel would be damaged.
 - Obey the supply voltage sequence. If wrong sequence is applied, the module would be damaged.


27


R2010-6053-O(3/3)


BOE	PRODUCT GROUP								RE	REV IS			ISSUE DATE	
	-	TFT- LCD	PRO	DUCT P							2014.04.30			30
SPEC. NUMBER	SPEC. NT156	TITLE WHM-N5	0 Pre	limir	ary I	Prod	uct S	peci	ficati	on		PAGE 28 OF 36		
 (4) Cautions for the atmosphere Dew drop atmosphere should be avoided. Do not store and/or operate the LCD module in a high temperature and/or humidity atmosphere. Storage in an electro-conductive polymer packing pouch and under relatively low temperature atmosphere is recommended. 														
 (5) Cautions for the module characteristics Do not apply fixed pattern data signal to the LCD module at product aging. Applying fixed pattern for a long time may cause image sticking. 														
 (6) Other cautions Do not disassemble and/or re-assemble LCD module. Do not re-adjust variable resistor or switch etc. When returning the module for repair or etc., Please pack the module not to be broken. We recommend to use the original shipping packages. 														
14.0 LABEL														
(1) Product label														
		T156WF				8D		E	<u>80</u>	2	E			
MADE IN CHINA CT: CFNAA01V2Y 001														
Module ID Naming Rule:														
Digit 1 2	2 3 4	5 6	7	8	9	10	11	12	13	14	15	16	17	
Code S L Description	S 5 de Grad Line	1 2 Year	3 Mont h			4 ension ts Of F(0	0	0 Serii 00001-	1 al No ZZZZZZ	D	В	
R2010-6053-O(3/3)	28 R2010-6053-O(3/3) A4(210 X 297)													

One step solution for LCD / PDP / OLED panel application: Datasheet, inventory and accessory! www.panelook.com

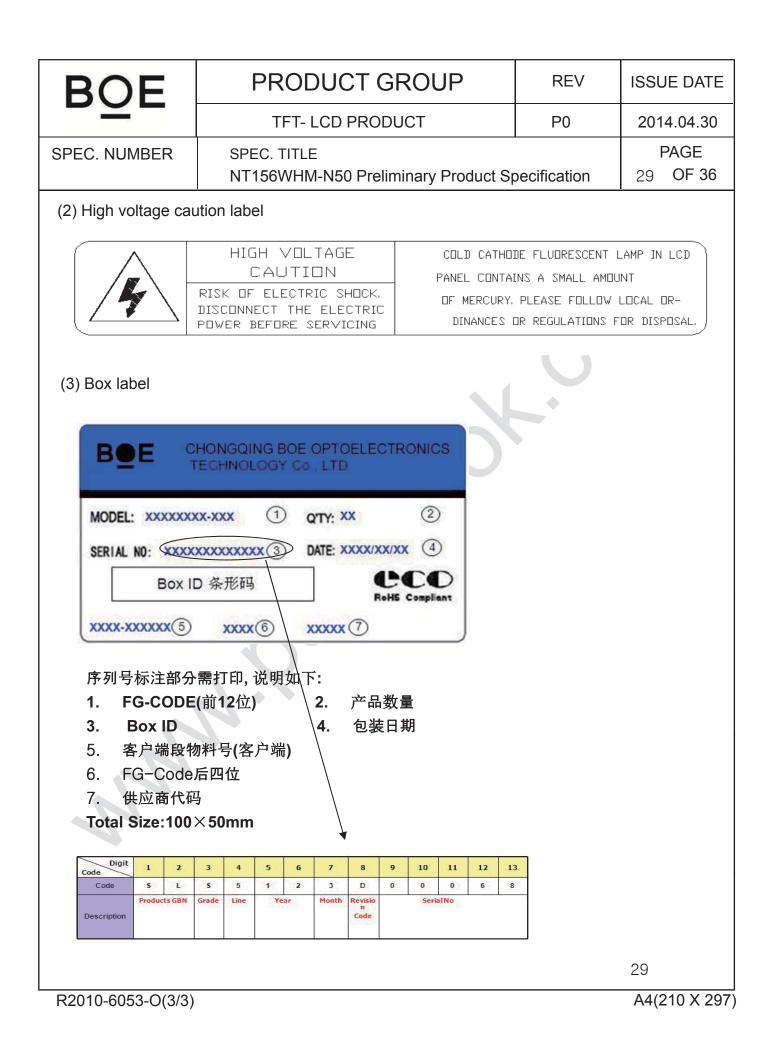

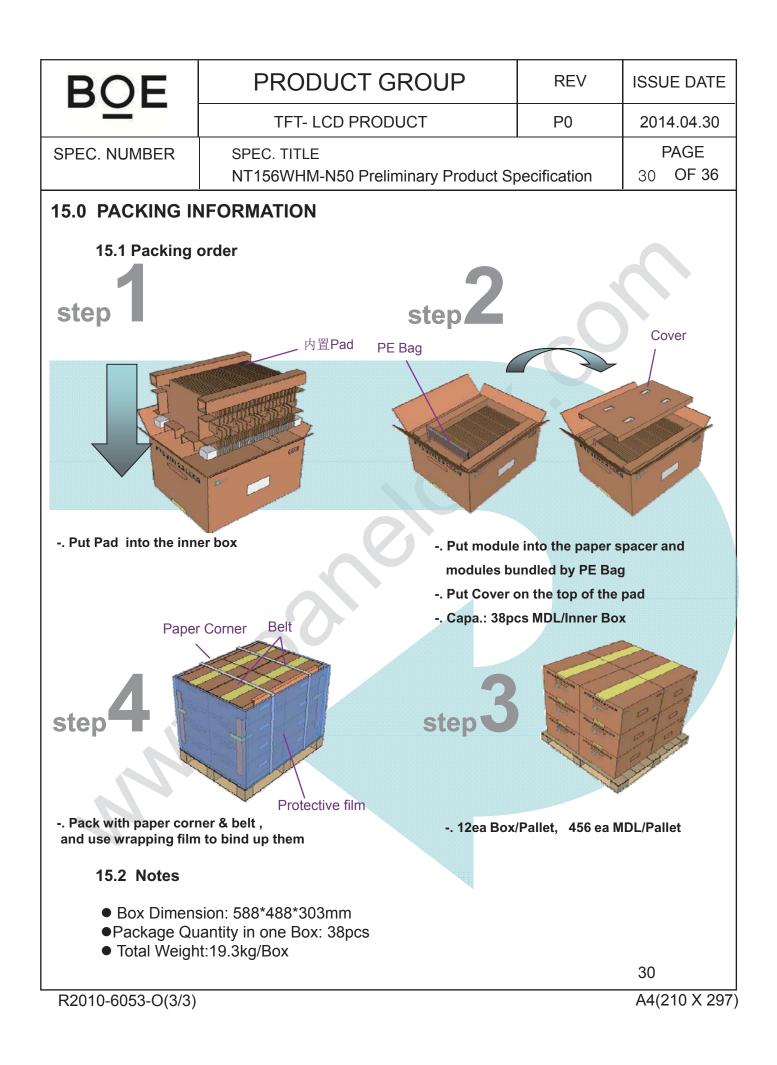

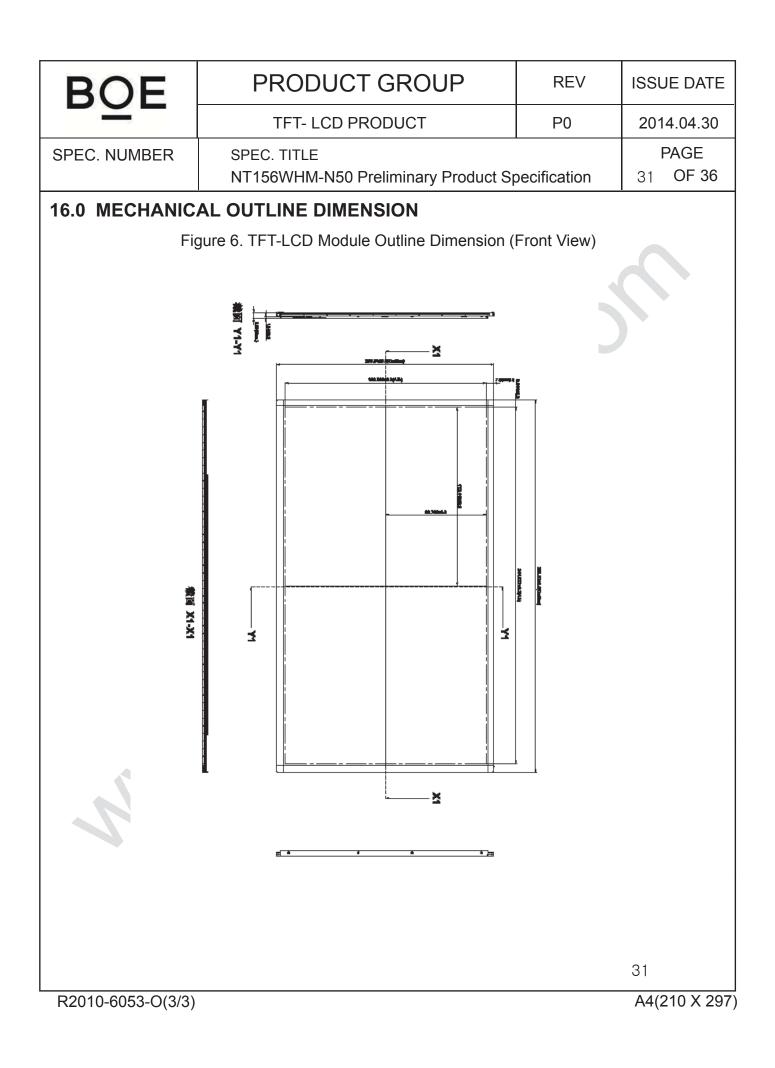

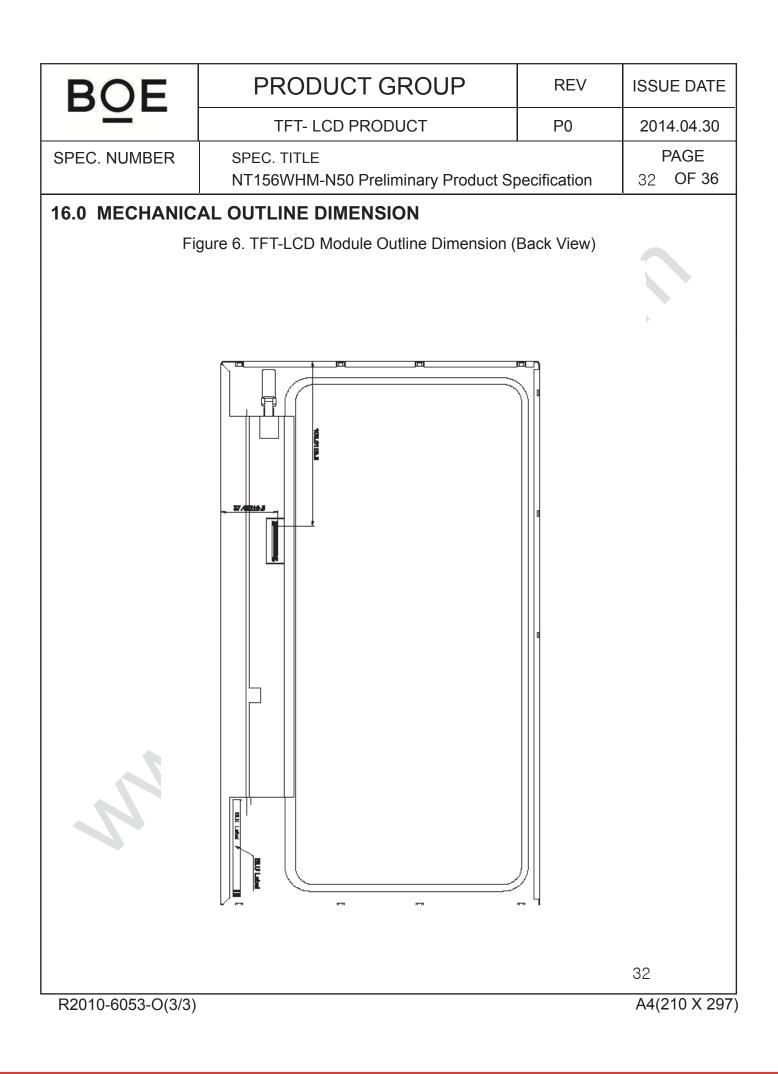

 \bigotimes

BOE		PR	ODUC	REV	ISSUE DATE		
		TI	T- LCD	P0	2014.04.30		
SPEC. I	NUMBER	SPEC. T NT156V) Preliminaı	ry Product Sp	pecification	PAGE 33 OF 36
17.0 EI	DID Table						
Address (HEX)	Function	Hex	Dec	Input values.		Notes	
00		00	0	0			
01		FF	255	255			
02	-	FF	255	255			
03	1	FF	255	255			
04	Header	FF	255	255		EDID Header	
05		FF	255	255			
06		FF	255	255			
07		00	0	0			
08	ID Manufacturer	09	9				
09	Name	E5	229	BOE		ID = BOE	
0A		D3 21					
0B	ID Product Code	06	6	1747		ID = 1747	
0C		00	0				
0D		00	0				
0E	32-bit serial No.	00	0				
0F	-	00	0				
10	Week of manufacture	-	1	1			
11	Year of Manufacture	-	26	2016	Ma	anufactured in 20	16
12	EDID Structure Ver.	01	1	1		EDID Ver 1.0	-
13	EDID revision #	03	3	3		EDID Rev. 0.3	
14	Video input definitior		149	-	die	gital signal/DP inp	ut
15	Max H image size	22	34	34		34 cm (Approx)	
16	Max V image size	13	19	19		19 cm (Approx)	
17	Display Gamma	78	120	2.2	G	samma curve = 2 .	2
18	Feature support	02	2		RGB display,	Preferred Timmin 4:4:4	g mode/RGB
19	Red/Green low bits	24	36	-	R	ed / Green Low Bi	ts
1A	Blue/White low bits	10	16	-		ue / White Low Bi	
1B	Red x high bits	97	151	0.590		(x) = 10010111 (0	
1C	Red y high bits	59	89	0.350		(y) = 01011001 (0)	
1D	Green x high bits	54	84	0.330	Green	(x) = 01010100	(0.33)
1E	Green y high bits	8E	142	0.555		(y) = 10001110 (· · · · ·
1F	Blue x high bits	27	39	0.153		(x) = 00100111 (0)	
20	BLue y high bits	1E	30	0.119		(y) = 00011110 (0	
21	White x high bits	50	80	0.313		(x) = 01010000 (1
22	White y high bits	54	84	0.329		(y) = 01010100 (
23	Established timing 1		0	-			
24	Established timing 2	-	0	_			

R2010-6053-O(3/3)

 \bigotimes

BOE		P F	RODUC	REV	ISSUE DA			
		-	TFT- LCD	P0	2014.04.			
PEC.	NUMBER	SPEC. NT156) Prelimina	ary Product Sp	ecification	PAGE	
.0 E	DID Table						1	
25	Established timing	3 00	0	-				
26	Oten dend timiner #4	01	1					
27	 Standard timing #1 	01	1			Not Used	\frown	
28	- Standard timing #2	01	1			Netland		
29		01	1			Not Used		
2A	- Standard timing #3	01	1			Not Used		
2B		01	1			Not Used		
2C	Standard timing #4	01	1			Not Used		
2D		01	1			Not Used		
2E	Standard timing #5	01	1			Not Used		
2F		01	1			Not Used		
30	Standard timing #6	01	1			Not Used		
31	Ŭ	01	1					
32	Standard timing #7	, 01	1			Not Used		
33		01	1					
34 35	Standard timing #8	01	1		-	Not Used		
36		01 3E	1 62					
37	-	3E 1C	28	72.3	7:	2.3MHz Main cloc	k	
38	-	56	86	1366	L	lor Active = 1366		
39	-	AO	160	160		or Blanking = 160		
3A		50	80	-	1	Active $+ 4$ bits of		
3B	-	00	0	768	1	Ver Active = 768	Ŭ	
3C		16	22	22		/er Blanking = 22		
3D		30	48	-		Active + 4 bits of		
3E	Detailed	30	48	48	1	or Sync Offset = 4	v	
3F	timing/monitor	20	32	32	H Sy	nc Pulse Width =	= 32	
40	descriptor #1	36	54	3	V s	sync Offset = 3 lii	ne	
41		00	0	6	V Syr	nc Pulse width: 6	line	
42		58	88	344	Horizontal Ima	ge Size = 344 mi	m (Low 8 bits)	
43		C2	194	194		e Size = 194 mm		
44	-	10	16	-		nage Size + 4 bits Size		
45	4	00	0	0		lor Border (pixels)		
46	-	00	0	0	1	rtical Border (Line		
47		1A	26		R	efer to right table	9	

R2010-6053-O(3/3)

B	OE	PF	RODUC	REV	ISSUE DATE					
	Ξ Ι	1	FT-LCD	PRODUCT	P0	2014.04.30				
SPEC.	NUMBER	SPEC.	TITLE			-	PAGE			
0.) Prelimina	ry Product Sp	pecification	35 OF 36			
7.0 E	DID Table									
48		00	0			OMU- Mala ala ala				
49		00	0	0		OMHz Main clock				
4A		00	0	0		Hor Active $= 0$				
4B		00	0	0		Hor Blanking = 0				
4C		00	0	-	4 bits of Hor.	Active + 4 bits of	Hor. Blanking			
4D		00	0	0		Ver Active = 0				
4E		00	0	0		Ver Blanking = 0				
4F		00	0	-	4 bits of Ver.	Active + 4 bits of	Ver. Blanking			
50	Detailed	00	0	0	Н	or Sync Offset =	0			
51	timing/monitor	00	0	0	H S	= 0				
52	descriptor #2	00	0	0	V	sync Offset =0 li	ne			
53		00	0	0	V Syr	V Sync Pulse width : 0 line Horizontal Image Size = 0 mm (Low 8 bits) Vertical Image Size =0 mm (Low 8 bits) bits of Hor Image Size + 4 bits of Ver Image Size				
54		00	0	0	Horizontal Im					
55		00	0	0	Vertical Ima					
56		00	0		4 bits of Hor Ir					
57		00	0	0	ŀ	lor Border (pixels	;)			
58		00	0	0	Vertical Border (Lines)					
59		1A	26							
5A		00	0							
5B		00	0							
5C		00	0		AS	SCII Data Sting T	ag			
5D		FE	254							
5E		00	0							
5F		42	66	В						
60		4F	79	0						
61		45	69	E						
62	Detailed	20	32							
63	timing/monitor descriptor #3	43	67	С]					
64		51	81	Q						
65		0A	10		Manu	facture name : B	OECQ			
66		20	32]					
67		20	32							
68		20	32							
69		20	32							
6A		20	32							
6B		20	32							

R2010-6053-O(3/3)

B	DE	PR	ODUC	REV	ISSUE DATE				
	<u> </u>	TI	T- LCD P	P0	2014.04.30				
SPEC. N	NUMBER	SPEC. T NT156V		Preliminar	y Product Sp	pecification	PAGE 36 OF 36		
17.0 ED	DID Table								
6C		00	0						
6D		00	0						
6E		00	0		Pro	duct Name Tag (A	SCII)		
6F		FE	254			5.			
70		00	0						
71		4E	78	N					
72		54	84	Т					
73		31	49	1					
74	Detailed timing/monito	35	53	5					
75	descriptor #4		54	6					
76		57	87	W	Madal				
77		48	72	Н	Iviode	odel name : NT156WHM-N50			
78		4D	77	М					
79		2D	45	-					
7A		4E	78	N					
7B		35	53	5					
7C		30	48	0					
7D		OA	10						
7E	Extension fla	g 00	0						
7F	Checksum	AF	175						

R2010-6053-O(3/3)

NNN .